

## 大功率 LED 草坪灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

### 应用场合 Applications

适用于草坪、园艺，小区绿化等景观照明。


Apply to lawns, gardens, residential green projects, landscape lighting, etc.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 5W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP011 |          | 1PC      | 860L×240W×240H   |

## 大功率 LED 草坪灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

### 应用场合 Applications


适用于草坪、园艺，小区绿化等景观照明。

Apply to lawns, gardens, residential green projects, landscape lighting, etc.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 5W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 9              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP012 |          | 1PC      | 810L×270W×200H   |

## 大功率 LED 草坪灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

### 应用场合 Applications

适用于草坪、园艺, 小区绿化等景观照明。


Apply to lawns, gardens, residential green projects, landscape lighting, etc.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 5W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP013 |          | 1PC      | 820L×220W×220H   |

## 大功率 LED 草坪灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

### 应用场合 Applications


适用于草坪、园艺, 小区绿化等景观照明。

Apply to lawns, gardens, residential green projects, landscape lighting, etc.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 5W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP014 |          | 1PC      | 610L×230W×230H   |

# 太阳能 LED 草坪插地灯

Solar LED Lawn Lamp



# 太阳能 LED 草坪插地灯

Solar LED Lawn Lamp



## 产品特点 Product Features

太阳能电池板与超高亮LED光源完美结合，不需布线，布灯简便，适用性强。

The perfect combination of solar panels and super bright LED light source, no need wiring, easy to install, strong applicability.

## 应用场合 Applications


适用于草坪、园艺，小区绿化等景观照明。

Apply to lawns, gardens, residential green projects, landscape lighting, etc.


## 规格参数 Specifications

|                                   |             |
|-----------------------------------|-------------|
| 材料 Material                       | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功率 Power (W)                      | 0.4W        |
| 输入电压 Input Voltage (V)            | 3.6V1000mA  |
| 光源类型 Light source Type            | DIP LED     |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs)  | 5           |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | 80          |
| 色温 Color Temp (k)                 | 2800-7000   |
| 环境温度 Environment Temperature (°C) | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |


## 配光曲线 Light Distribution Curve



## 外形尺寸图 Dimension Diagram



## 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP015 |          | 8PCS     | 810L×400W×630H   |

## 产品特点 Product Features

太阳能电池板与超高亮LED光源完美结合，不需布线，布灯简便，适用性强。

The perfect combination of solar panels and super bright LED light source, no need wiring, easy to install, strong applicability.

## 应用场合 Applications


适用于草坪、园艺，小区绿化等景观照明。

Apply to lawns, gardens, residential green projects, landscape lighting, etc.


## 规格参数 Specifications

|                                   |             |
|-----------------------------------|-------------|
| 材料 Material                       | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功率 Power (W)                      | 0.4W        |
| 输入电压 Input Voltage (V)            | 3.6V1000mA  |
| 光源类型 Light source Type            | DIP LED     |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs)  | 5           |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | 80          |
| 色温 Color Temp (k)                 | 2800-7000   |
| 环境温度 Environment Temperature (°C) | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |


## 配光曲线 Light Distribution Curve



## 外形尺寸图 Dimension Diagram



## 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP016 |          | 8PCS     | 910L×460W×630H   |



## 太阳能 LED 草坪插地灯

Solar LED Lawn Lamp

BSD-CP017



### 产品特点 Product Features

太阳能电池板与超高亮LED光源完美结合，不需布线，布灯简便，适用性强。

The perfect combination of solar panels and super bright LED light source, no need wiring, easy to install, strong applicability.

### 应用场合 Applications

适用于草坪、园艺，小区绿化等景观照明。


Apply to lawns, gardens, residential green projects, landscape lighting, etc.

### 规格参数 Specifications


|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 0.4W        |
| 输入电压 Input Voltage (V)            | 3.6V1000mA  |
| 光源类型 Light source Type            | DIP LED     |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 5           |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | 80          |
| 色 温 Color Temp (k)                | 2800-7000   |
| 环境温度 Environment Temperature (°C) | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |




### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP017 |          | 12PCS    | 620L×505W×200H   |

## 太阳能 LED 草坪插地灯

Solar LED Lawn Lamp



BSD-CP018



### 产品特点 Product Features

太阳能电池板与超高亮LED光源完美结合，不需布线，布灯简便，适用性强。

The perfect combination of solar panels and super bright LED light source, no need wiring, easy to install, strong applicability.

### 应用场合 Applications


适用于草坪、园艺，小区绿化等景观照明。

Apply to lawns, gardens, residential green projects, landscape lighting, etc.


### 规格参数 Specifications

|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 0.4W        |
| 输入电压 Input Voltage (V)            | 3.6V1000mA  |
| 光源类型 Light source Type            | DIP LED     |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 5           |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | 80          |
| 色 温 Color Temp (k)                | 2800-7000   |
| 环境温度 Environment Temperature (°C) | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP018 |          | 6PCS     | 470L×330W×240H   |

## 大功率 LED 草坪插地灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用超高亮LED为光源，恒流方式驱动。优质防水接头、硅胶密封圈、强化玻璃。外壳采用铝合金灯体和压铸加工工艺（可选不锈钢）。

Using super bright LED as the light source, constant current way of driving. High quality waterproof joint, silicon rubber sealing ring, toughened glass. Light shell uses aluminum alloy with die-casting processing technology (optional stainless steel).

### 应用场合 Applications

广泛用于广场、公园、休闲场所等户外照明，公园绿化、草坪、广场、庭院、花坛、步行街装饰。


Widely apply to squares, parks, leisure places, outdoor lighting, etc. Park green project, lawn, courtyard, flower terrace, and pedestrian street decoration.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 3W             |
| 输入电压 Input Voltage (V)            | 95-240         |
| 光源类型 Light source Type            | Integrated LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP019 |          | 10PCS    | 750L×310W×260H   |

## 大功率 LED 草坪插地灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用超高亮LED为光源，恒流方式驱动。优质防水接头、硅胶密封圈、强化玻璃。外壳采用铝合金灯体和压铸加工工艺（可选不锈钢）。

Using super bright LED as the light source, constant current way of driving. High quality waterproof joint, silicon rubber sealing ring, toughened glass. Light shell uses aluminum alloy with die-casting processing technology (optional stainless steel).

### 应用场合 Applications


广泛用于广场、公园、休闲场所等户外照明，公园绿化、草坪、广场、庭院、花坛、步行街装饰。

Widely apply to squares, parks, leisure places, outdoor lighting, etc. Park green project, lawn, courtyard, flower terrace, and pedestrian street decoration.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 3W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | Integrated LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP020 |          | 10PCS    | 550L×230W×200H   |

## 大功率 LED 草坪插地灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用超高亮LED为光源，恒流方式驱动。优质防水接头、硅胶密封圈、强化玻璃。外壳采用铝合金灯体和压铸加工工艺（可选不锈钢）。

Using super bright LED as the light source, constant current way of driving. High quality waterproof joint, silicon rubber sealing ring, toughened glass. Light shell uses aluminum alloy with die-casting processing technology (optional stainless steel).

### 应用场合 Applications

广泛用于广场、公园、休闲场所等户外照明，公园绿化、草坪、广场、庭院、花坛、步行街装饰。


Widely apply to squares, parks, leisure places, outdoor lighting, etc. Park green project, lawn, courtyard, flower terrace, and pedestrian street decoration.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 5W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | Integrated LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP021 |          | 12PCS    | 530L×360W×440H   |

## 大功率 LED 草坪插地灯

High-power LED Lawn Lamp



### 产品特点 Product Features

采用超高亮LED为光源，恒流方式驱动。优质防水接头、硅胶密封圈、强化玻璃。外壳采用铝合金灯体和压铸加工工艺（可选不锈钢）。

Using super bright LED as the light source, constant current way of driving. High quality waterproof joint, silicon rubber sealing ring, toughened glass. Light shell uses aluminum alloy with die-casting processing technology (optional stainless steel).

### 应用场合 Applications


广泛用于广场、公园、休闲场所等户外照明，公园绿化、草坪、广场、庭院、花坛、步行街装饰。

Widely apply to squares, parks, leisure places, outdoor lighting, etc. Park green project, lawn, courtyard, flower terrace, and pedestrian street decoration.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 9W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 9              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram



### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP022 |          | 6PCS     | 560L×310W×230H   |

## 大功率 LED 草坪插地灯

### High-power LED Lawn Lamp


**BSD-CP023**

#### 产品特点 Product Features

采用超高亮LED为光源，恒流方式驱动。优质防水接头、硅胶密封圈、强化玻璃。外壳采用铝合金灯体和压铸加工工艺（可选不锈钢）。

Using super bright LED as the light source, constant current way of driving. High quality waterproof joint, silicon rubber sealing ring, toughened glass. Light shell uses aluminum alloy with die-casting processing technology (optional stainless steel).

#### 应用场合 Applications

广泛用于广场、公园、休闲场所等户外照明，公园绿化、草坪、广场、庭院、花坛、步行街装饰。


Widely apply to squares, parks, leisure places, outdoor lighting, etc. Park green project, lawn, courtyard, flower terrace, and pedestrian street decoration.

#### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 12W            |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | Integrated LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




#### 配光曲线 Light Distribution Curve



#### 外形尺寸图 Dimension Diagram




#### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP023 |          | 6PCS     | 350L×200W×150H   |

## 大功率 LED 草坪插地灯

### High-power LED Lawn Lamp

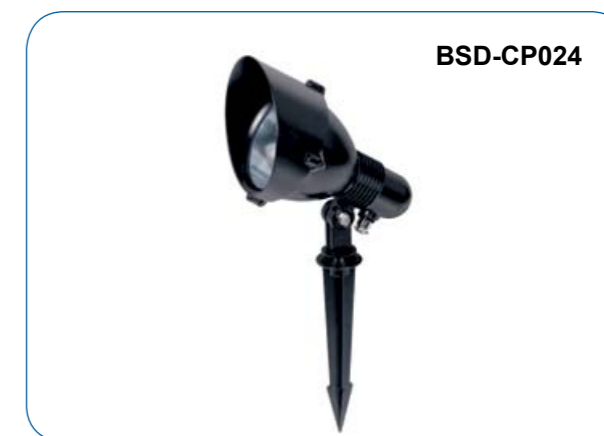
**BSD-CP024**

#### 产品特点 Product Features

采用超高亮LED为光源，恒流方式驱动。优质防水接头、硅胶密封圈、强化玻璃。外壳采用铝合金灯体和压铸加工工艺（可选不锈钢）。

Using super bright LED as the light source, constant current way of driving. High quality waterproof joint, silicon rubber sealing ring, toughened glass. Light shell uses aluminum alloy with die-casting processing technology (optional stainless steel).

#### 应用场合 Applications

广泛用于广场、公园、休闲场所等户外照明，公园绿化、草坪、广场、庭院、花坛、步行街装饰。


Widely apply to squares, parks, leisure places, outdoor lighting, etc. Park green project, lawn, courtyard, flower terrace, and pedestrian street decoration.

#### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 7W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | Integrated LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




#### 配光曲线 Light Distribution Curve



#### 外形尺寸图 Dimension Diagram



#### 包装参数 Packaging Parameters




| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-CP024 |          | 6PCS     | 530L×360W×440H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM001

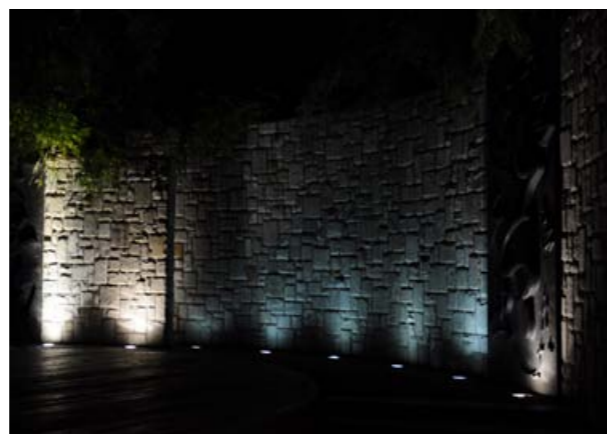

### 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅橡胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

### 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材料 Material                       | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功率 Power (W)                      | 1W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs)  | 1              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色温 Color Temp (k)                 | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

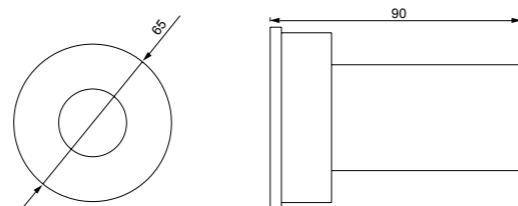

### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM001 |          | 50PCS    | 630L×630W×200H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM002



### 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅橡胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

### 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材料 Material                       | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功率 Power (W)                      | 3W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs)  | 3              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色温 Color Temp (k)                 | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

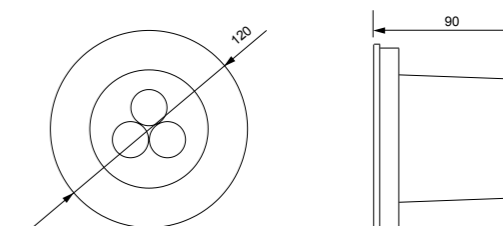

### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM002 |          | 50PCS    | 630L×630W×200H   |





## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM003



### 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅橡胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

### 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 4W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 4              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

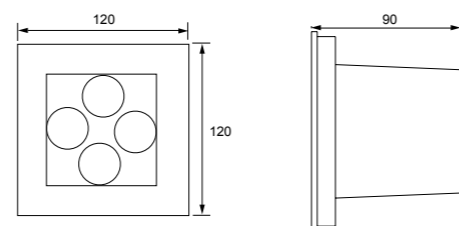

### 包装参数 Packaging Parameters




| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM003 |          | 50PCS    | 630L×630W×200H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM004

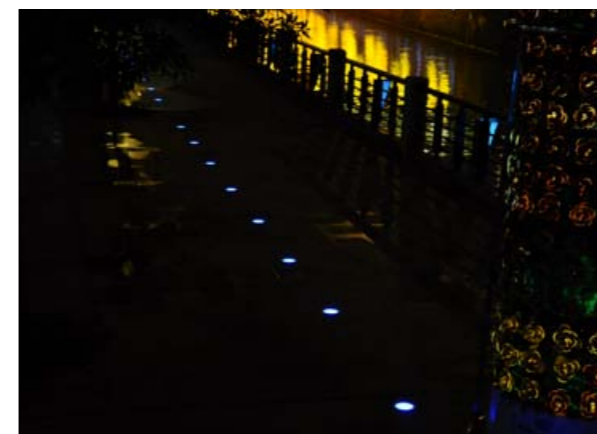

### 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅橡胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

### 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 4W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 4              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

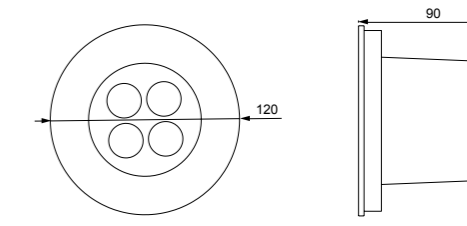


### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM004 |          | 50PCS    | 630L×630W×200H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light

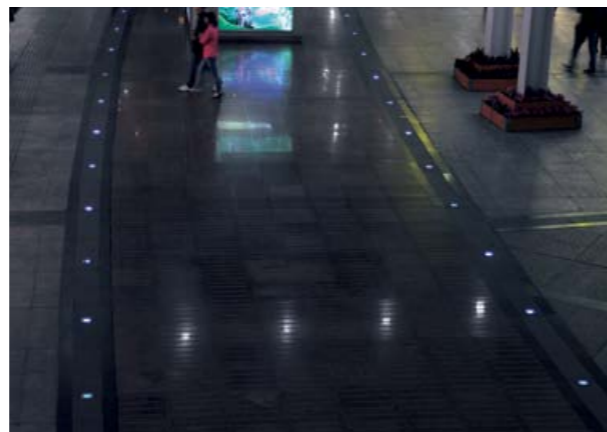

## 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

## 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


## 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 5W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 5              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


## 配光曲线 Light Distribution Curve



## 外形尺寸图 Dimension Diagram

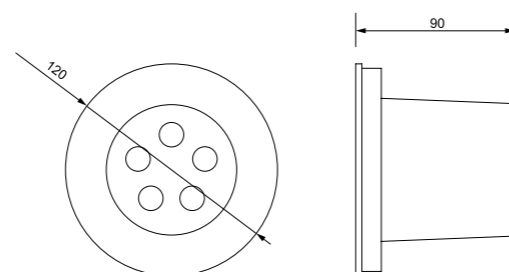


## 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM005 |          | 50PCS    | 630L×630W×200H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light

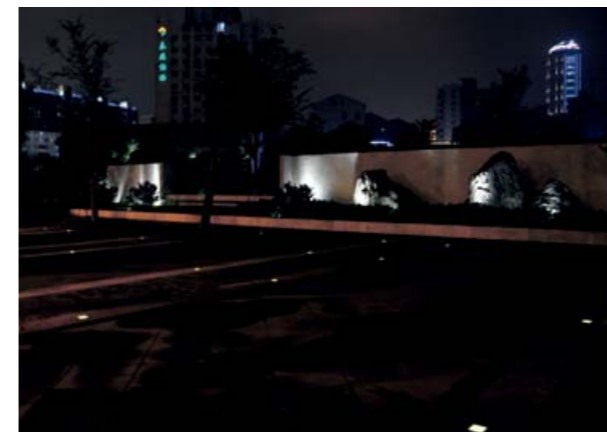

## 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

## 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


## 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 9W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 9              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


## 配光曲线 Light Distribution Curve



## 外形尺寸图 Dimension Diagram

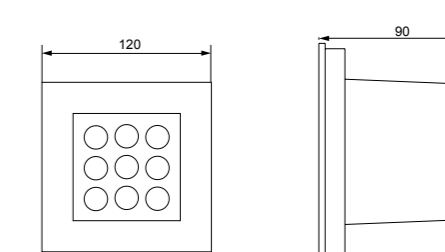

## 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM006 |          | 50PCS    | 630L×630W×200H   |