

# 大功率 LED 地埋灯

High-power LED Under Ground Light



## 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

## 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


## 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 9W             |
| 输入电压 Input Voltage (V)            | 100-240        |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 9              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


## 配光曲线 Light Distribution Curve



## 外形尺寸图 Dimension Diagram

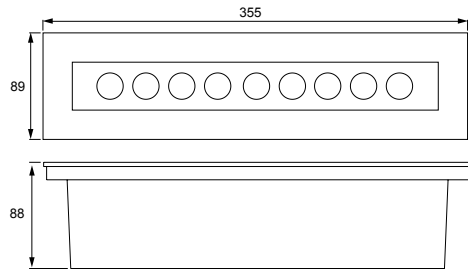

## 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM007 |          | 15PCS    | 500L×400W×320H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



## 产品特点 Product Features

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

## 应用场合 Applications


该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.


## 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 15W            |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 15             |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


## 配光曲线 Light Distribution Curve



## 外形尺寸图 Dimension Diagram

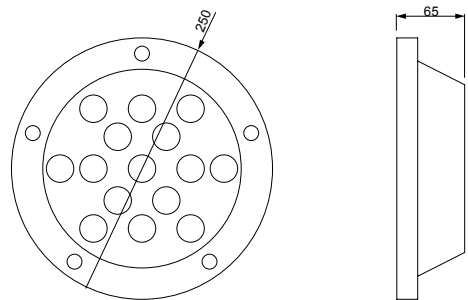

## 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM008 |          | 10PCS    | 550L×380W×300H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



**产品特点 Product Features**

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。



Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

**应用场合 Applications**

该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.

| 规格参数 Specifications               |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 19W            |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 19             |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |

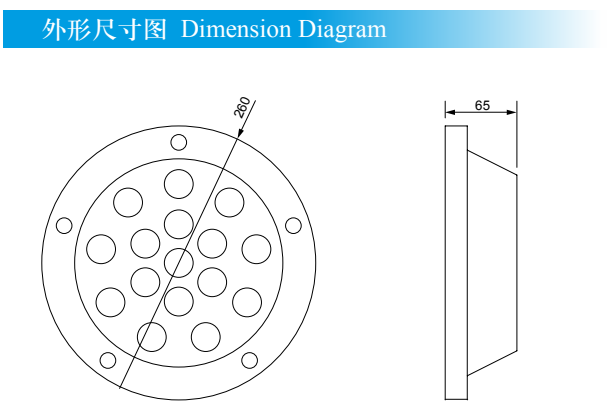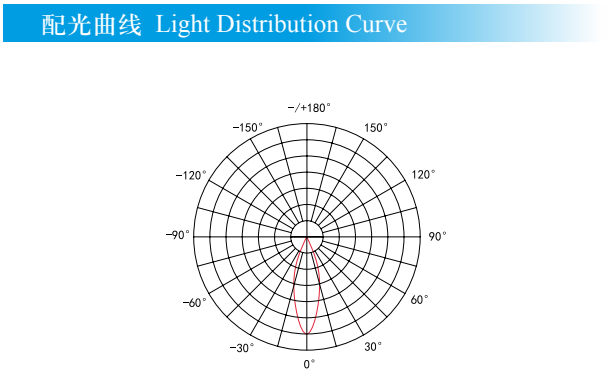

| 包装参数 Packaging Parameters |          |                  |
|---------------------------|----------|------------------|
|                           |          |                  |
| Item                      | Size(mm) | 包装数量 Qty         |
| BSD-DM009                 |          | 10PCS            |
|                           |          | 外箱尺寸 Carton Size |
|                           |          | 570L×380W×310H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



**产品特点 Product Features**

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。



Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

**应用场合 Applications**

该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.

| 规格参数 Specifications               |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 36W            |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 36             |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |

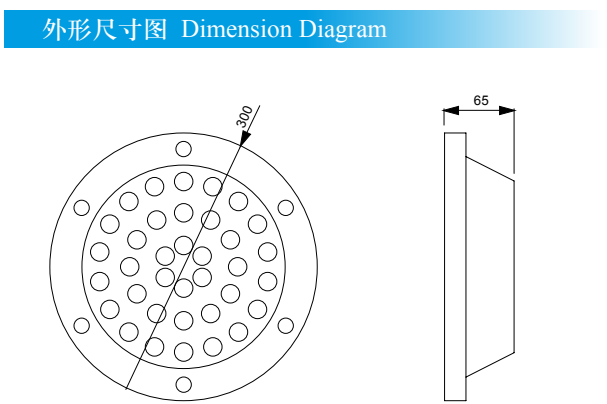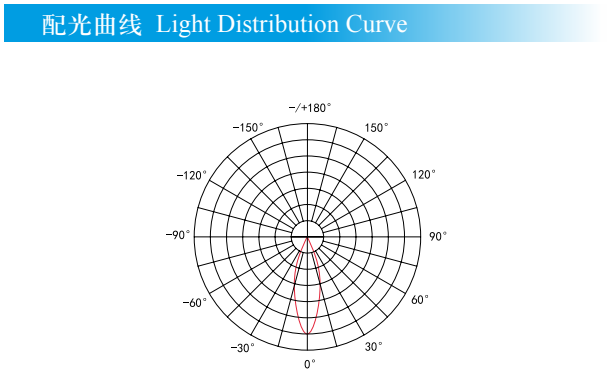

| 包装参数 Packaging Parameters |          |                  |
|---------------------------|----------|------------------|
|                           |          |                  |
| Item                      | Size(mm) | 包装数量 Qty         |
| BSD-DM010                 |          | 10PCS            |
|                           |          | 外箱尺寸 Carton Size |
|                           |          | 650L×380W×350H   |

# 大功率 LED 地埋灯

## High-power LED Under Ground Light



**产品特点 Product Features**

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.



**应用场合 Applications**

该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.

**规格参数 Specifications**

|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 4W          |
| 输入电压 Input Voltage (V)            | 85-265      |
| 光源类型 Light source Type            | DIP         |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 52          |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | 80          |
| 色 温 Color Temp (k)                | 2800-7000   |
| 环境温度 Environment Temperature (℃)  | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |

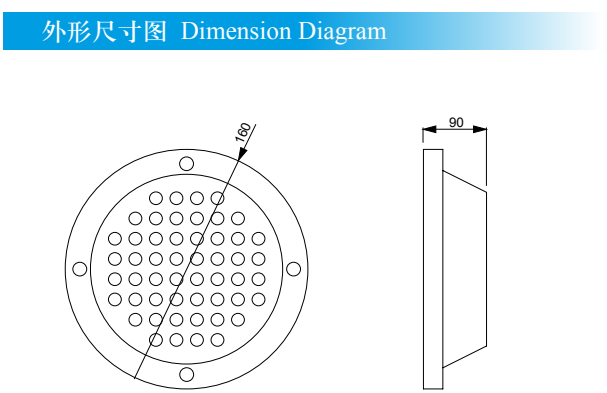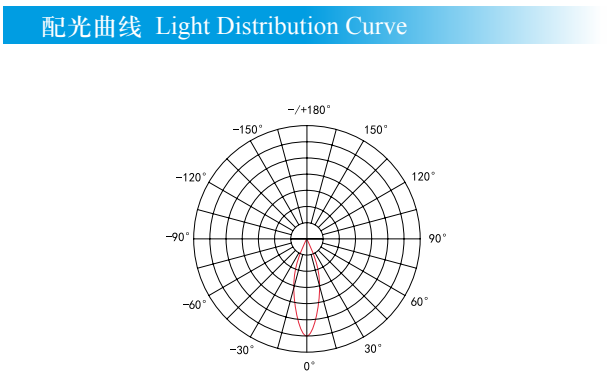

**包装参数 Packaging Parameters**

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM011 |          | 10PCS    | 500L×370W×210H   |

# 大功率 LED 地埋灯

## High-power LED Under Ground Light



**产品特点 Product Features**

产品采用压铸铝材制作、硅橡胶密封；产品采用进口光源、确保高亮度。选用单色或全彩效果，恒流驱动电源、导热硅胶密封线路板、性能稳定、防护优越。

Die casting aluminum material, silicon rubber seal, imported light source, high brightness, single color or full color effect. Constant current driving power supply, conductive heat silicon seal PCB, stable and protective.

**应用场合 Applications**

该产品适用于城市广场、园林道路、商业步行街、停车场等场所的地面装饰照明。

Apply to city squares, garden roads, commercial streets, parking lots and the like underground decorative lighting.

**规格参数 Specifications**

|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 5W          |
| 输入电压 Input Voltage (V)            | 85-265      |
| 光源类型 Light source Type            | DIP         |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 61          |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | 80          |
| 色 温 Color Temp (k)                | 2800-7000   |
| 环境温度 Environment Temperature (℃)  | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |

**包装参数 Packaging Parameters**

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM012 |          | 10PCS    | 500L×370W×210H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM013



### 产品特点 Product Features

灯具外壳采用优质铝型材，压铸铝端盖；表面阳极或喷涂处理。灯体精致美观，散热性能好；灯体采用高强度钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，因此灯具具有双重防水功能，防水效果优越；灯具光源采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能；灯具均采用PMMA光学透镜。

Light shell and cover are die casting aluminum; Anodic oxidation or spraycoating surface process; Delicate and beautiful, good heat dissipation performance. The main body is toughened glass and high-quality silicon rubber seal, and encapsulated epoxy resin inside, superior double water-proof function. Using imported super bright white LED as the light source, built-in constant-current driving power, excellent stability; PMMA optical lens.

### 应用场合 Applications

适用于城市广场，庭院别墅，宾馆酒店大堂，公园及商业步行街等各种地面场所。


Apply to city squares, gardens and villas, hotel lobbies, commercial streets, parks, commercial streets and the like underground decorative lighting.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 6W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 6              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve

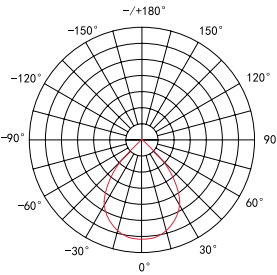

### 外形尺寸图 Dimension Diagram

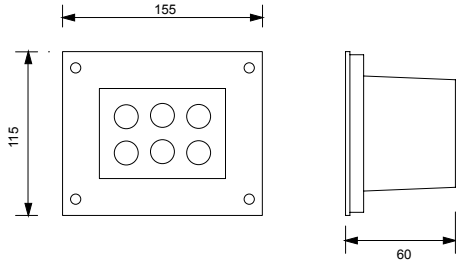

### 包装参数 Packaging Parameters

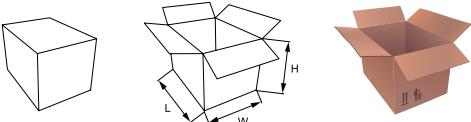

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM013 |          | 10PCS    | 350L×280W×210H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM014



### 产品特点 Product Features

高强度钢化玻璃罩,为LED定身制作；增强型硅橡胶密封垫，防护等级可达IP65；光源选用超高亮度的LED，颜色有单色、双色、七彩颜色渐变、跳变等多种色彩组合选择。具有显著的节能效果，性能稳定，寿命长。造型别致优雅，防尘、防漏电。投射角度调节范围大。健康环保。无频闪，无红外光和紫外光。

High strength toughened glass cover, which is tailor-made for LED; Enhanced silicon rubber sealer, IP65; Using super bright LED lights as the light source, single, double, rainbow color and colors can be freely combined. Remarkable energy saving effect, stable, long lifespan. Unique and elegant outlook, dust proof and anti-creep. Wide projection angle, healthy and eco-friendly. No flicker, no infrared and UV light.

### 应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


### 规格参数 Specifications

|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 3W          |
| 输入电压 Input Voltage (V)            | 85-265      |
| 光源类型 Light source Type            | DIP         |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 50          |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | —           |
| 色 温 Color Temp (k)                | RGB         |
| 环境温度 Environment Temperature (°C) | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |


### 配光曲线 Light Distribution Curve

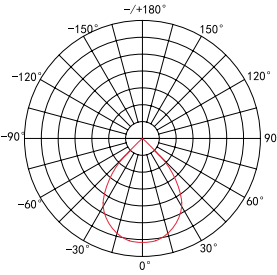

### 外形尺寸图 Dimension Diagram

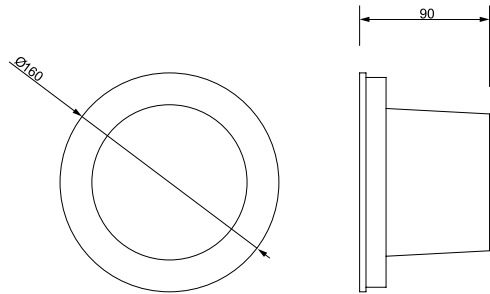

### 包装参数 Packaging Parameters

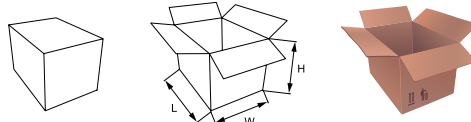

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM014 |          | 10PCS    | 500L×370W×210H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



产品特点 Product Features

采用超高亮LED为光源，选用LED恒流驱动方式的新型埋地装饰灯。体积小，散热好，优质防水接头、硅胶密封圈、强化玻璃；外壳采用铝合金灯体和整体模压加工工艺，确保了良好的散热效果；镜面采用8mm钢化玻璃，抗压能力强，防水等级IP65。

Using super bright LED as the light source, constant current driving way, new-type decorative lamp. Small size, excellent heat dissipation, with good quality waterproof joint, silicon rubber sealing ring, and toughened glass; The shell is aluminum alloy and overall is adopted mould pressing process, which ensure the superior heat dissipation. 8 mm toughened glass, high compressive ability, IP65.

应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 6W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 5              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |



配光曲线 Light Distribution Curve

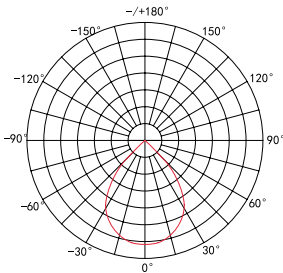

外形尺寸图 Dimension Diagram

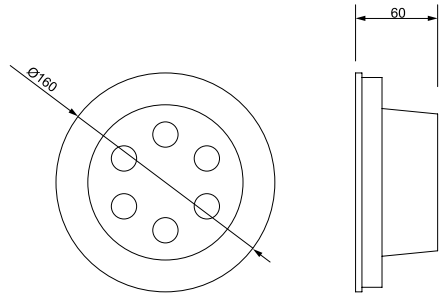

包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM015 |          | 10PCS    | 500L×370W×210H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



产品特点 Product Features

采用大功率LED，设计理念领先，优质不锈钢和高级耐腐材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

High-power LED, design-leading, high-quality stainless steel and corrosion-resistant materials, precision production, excellent overall performance, compact structure, high lumenous efficiency, changeable color and color temperature.

应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 9W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 9              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | —              |
| 色 温 Color Temp (k)                | RGB            |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |



配光曲线 Light Distribution Curve

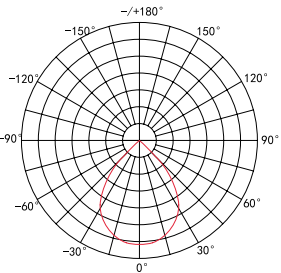

外形尺寸图 Dimension Diagram

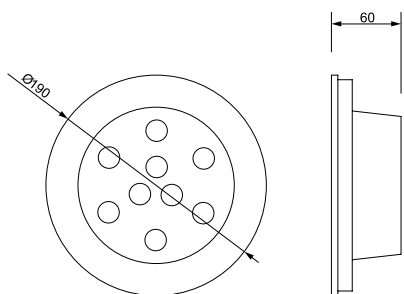

包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM016 |          | 20PCS    | 415L×415W×370H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM017



### 产品特点 Product Features

高强度钢化玻璃罩,为LED定制制作; 增强型硅橡胶密封垫, 防护等级可达IP65; 光源选用超高亮度的LED, 颜色有单色、双色、七彩颜色渐变、跳变等多种色彩组合选择。具有显著的节能效果, 性能稳定, 寿命长。造型别致优雅, 防尘、防漏电。投射角度调节范围大。健康环保。无频闪, 无红外光和紫外光。

High strength toughened glass cover, which is tailor-made for LED; Enhanced silicon rubber sealer, IP65; Using super bright LED lights as the light source, single, double, rainbow color and colors can be freely combined. Remarkable energy saving effect, stable, long lifespan. Unique and elegant outlook, dust proof and anti-creep. Wide projection angle, healthy and eco-friendly. No flicker, no infrared and UV light.

### 应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 12W            |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 12             |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve

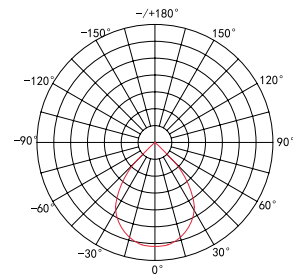

### 外形尺寸图 Dimension Diagram

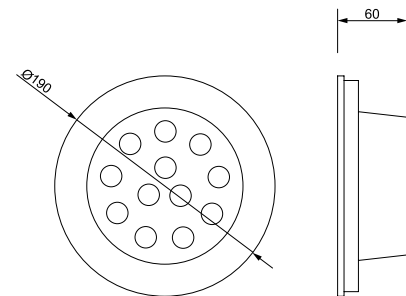

### 包装参数 Packaging Parameters

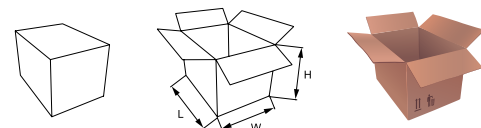

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM017 |          | 20PCS    | 415L×415W×370H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM018



### 产品特点 Product Features

采用超高亮LED为光源, 选用LED恒流驱动方式的新型埋地装饰灯。体积小, 散热好, 优质防水接头、硅胶密封圈、强化玻璃; 外壳采用铝合金灯体和整体模压加工工艺, 确保了良好的散热效果; 镜面采用8mm钢化玻璃, 抗压能力强, 防水等级IP65。

Using super bright LED as the light source, constant current driving way, new-type decorative lamp. Small size, excellent heat dissipation, with good quality waterproof joint, silicon rubber sealing ring, and toughened glass; The shell is aluminum alloy and overall is adopted mould pressing process, which ensure the superior heat dissipation. 8 mm toughened glass, high compressive ability, IP65.

### 应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 7W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 7              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve

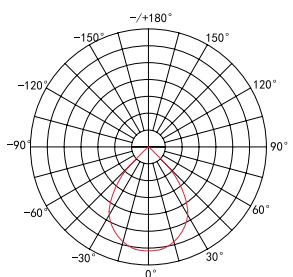

### 外形尺寸图 Dimension Diagram

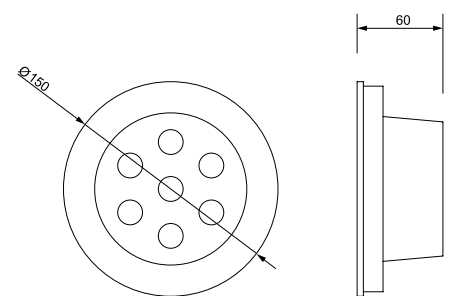

### 包装参数 Packaging Parameters

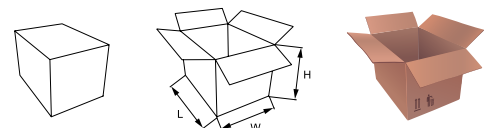

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM018 |          | 20PCS    | 335L×335W×370H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM019



### 产品特点 Product Features

采用超高亮LED为光源，选用LED恒流驱动方式的新型埋地装饰灯。体积小，散热好，优质防水接头、硅胶密封圈、强化玻璃；外壳采用铝合金灯体和整体模压加工工艺，确保了良好的散热效果；镜面采用8mm钢化玻璃，抗压能力强，防水等级IP65。

Using super bright LED as the light source, constant current driving way, new-type decorative lamp. Small size, excellent heat dissipation, with good quality waterproof joint, silicon rubber sealing ring, and toughened glass; The shell is aluminum alloy and overall is adopted mould pressing process, which ensure the superior heat dissipation. 8 mm toughened glass, high compressive ability, IP65.

### 应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

### 规格参数 Specifications


|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 3W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 3              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |




### 配光曲线 Light Distribution Curve

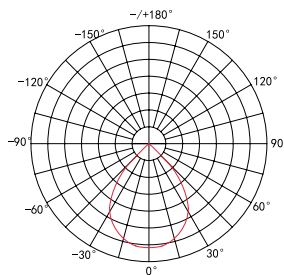

### 外形尺寸图 Dimension Diagram

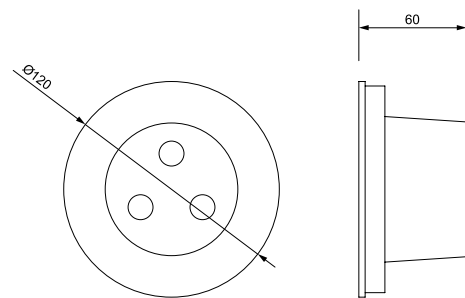

### 包装参数 Packaging Parameters

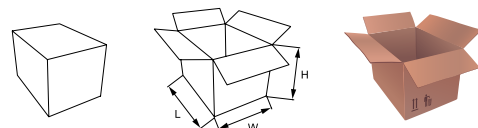

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM019 |          | 45PCS    | 415L×415W×370H   |

## 大功率 LED 地埋灯

High-power LED Under Ground Light



BSD-DM020



### 产品特点 Product Features

灯具外壳采用优质铝型材，压铸铝端盖；表面阳极或喷涂处理。灯体精致美观，散热性能好；灯体采用高强度钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，因此灯具具有双重防水功能，防水效果优越；灯具光源采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能；灯具均采用PMMA光学透镜。

Light shell and cover are die casting aluminum; Anodic oxidation or spraycoating surface process; Delicate and beautiful, good heat dissipation performance. The main body is toughened glass and high-quality silicon rubber seal, and encapsulated epoxy resin inside, superior double water-proof function. Using imported super bright white LED as the light source, built-in constant-current driving power, excellent stability; PMMA optical lens.

### 应用场合 Applications


适用于城市广场，庭院别墅，宾馆酒店大堂，公园及商业步行街等各种地面场所。

Apply to city squares, gardens and villas, hotel lobbies, commercial streets, parks, commercial streets and the like underground decorative lighting.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 9W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 9              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve

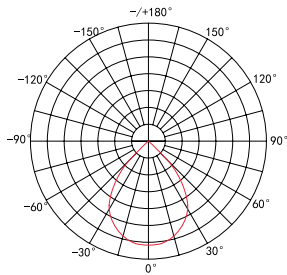

### 外形尺寸图 Dimension Diagram

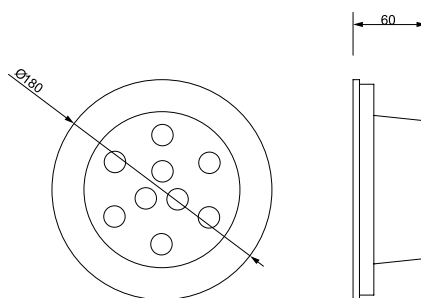

### 包装参数 Packaging Parameters

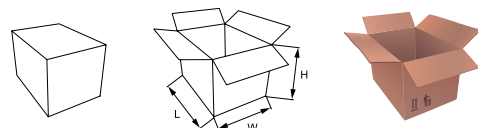

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM020 |          | 20PCS    | 415L×415W×370H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM021




### 产品特点 Product Features


高强度钢化玻璃罩,为LED定制制作; 增强型硅橡胶密封垫, 防护等级可达IP65; 光源选用超高亮度的LED, 颜色有单色、双色、七彩颜色渐变、跳变等多种色彩组合选择。具有显著的节能效果, 性能稳定, 寿命长。造型别致优雅, 防尘、防漏电。投射角度调节范围大。健康环保。无频闪, 无红外光和紫外光。

High strength toughened glass cover, which is tailor-made for LED; Enhanced silicon rubber sealer, IP65; Using super bright LED lights as the light source, single, double, rainbow color and colors can be freely combined. Remarkable energy saving effect, stable, long lifespan. Unique and elegant outlook, dust proof and anti-creep. Wide projection angle, healthy and eco-friendly. No flicker, no infrared and UV light.


### 配光曲线 Light Distribution Curve

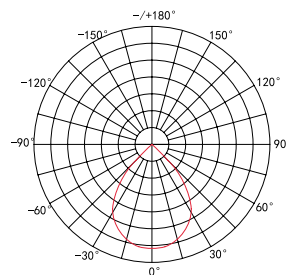

### 外形尺寸图 Dimension Diagram

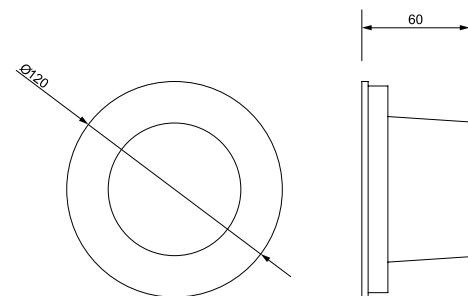

### 包装参数 Packaging Parameters





| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM021 |          | 45PCS    | 415L×415W×370H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM022

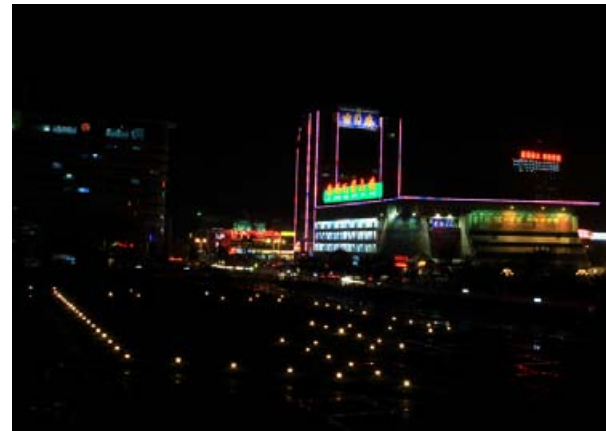


### 产品特点 Product Features


高强度钢化玻璃罩,为LED定制制作; 增强型硅橡胶密封垫, 防护等级可达IP65; 光源选用超高亮度的LED, 颜色有单色、双色、七彩颜色渐变、跳变等多种色彩组合选择。具有显著的节能效果, 性能稳定, 寿命长。造型别致优雅, 防尘、防漏电。投射角度调节范围大。健康环保。无频闪, 无红外光和紫外光。

High strength toughened glass cover, which is tailor-made for LED; Enhanced silicon rubber sealer, IP65; Using super bright LED lights as the light source, single, double, rainbow color and colors can be freely combined. Remarkable energy saving effect, stable, long lifespan. Unique and elegant outlook, dust proof and anti-creep. Wide projection angle, healthy and eco-friendly. No flicker, no infrared and UV light.


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

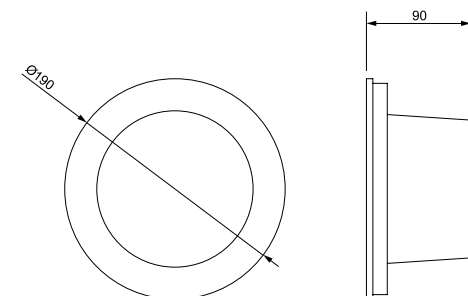

### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM022 |          | 12PCS    | 415L×415W×370H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



产品特点 Product Features

采用大功率LED，设计理念领先，优质不锈钢和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

High-power LED, design-leading, high-quality stainless steel and corrosion-resistant materials, precision production, excellent overall performance, compact structure, high lumenous efficiency, changeable color and color temperature.

应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


规格参数 Specifications

|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 3W          |
| 输入电压 Input Voltage (V)            | 85-265      |
| 光源类型 Light source Type            | DIP         |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 24          |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | —           |
| 色 温 Color Temp (k)                | RGB         |
| 环境温度 Environment Temperature (℃)  | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |

配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

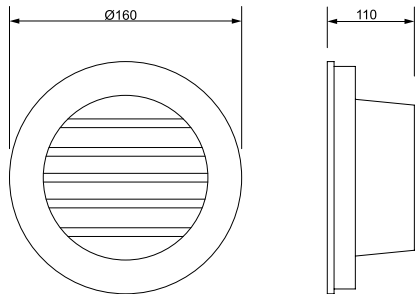

包装参数 Packaging Parameters

| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM023 |          | 10PCS    | 620L×355W×190H   |

# 大功率 LED 地埋灯

High-power LED Under Ground Light



产品特点 Product Features

采用大功率LED，设计理念领先，优质不锈钢和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

High-power LED, design-leading, high-quality stainless steel and corrosion-resistant materials, precision production, excellent overall performance, compact structure, high lumenous efficiency, changeable color and color temperature.

应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 4W             |
| 输入电压 Input Voltage (V)            | 85-265         |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 4              |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (℃)  | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |

配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

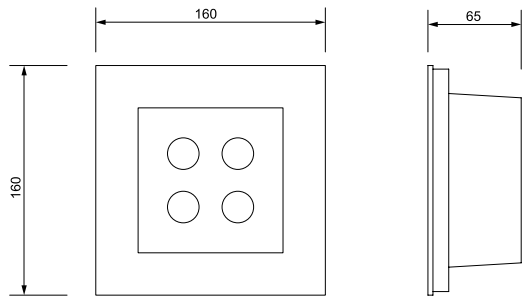

包装参数 Packaging Parameters


| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM024 |          | 10PCS    | 500L×370W×270H   |



## 大功率 LED 地埋灯

High-power LED Under Ground Light

BSD-DM025



### 产品特点 Product Features

采用大功率LED，设计理念领先，优质不锈钢和高级耐腐材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

High-power LED, design-leading, high-quality stainless steel and corrosion-resistant materials, precision production, excellent overall performance, compact structure, high lumenous efficiency, changeable color and color temperature.

### 应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

### 规格参数 Specifications


|                                   |             |
|-----------------------------------|-------------|
| 材 料 Material                      | Al          |
| 防护等级 IP Rating                    | IP65        |
| 功 率 Power (W)                     | 4W          |
| 输入电压 Input Voltage (V)            | 85-265      |
| 光源类型 Light source Type            | DIP         |
| 芯片尺寸 Chip Size (mil)              | 12*12       |
| 光源数量 Light Source Quantity (pcs ) | 70          |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130      |
| 显色指数 CRI                          | —           |
| 色 温 Color Temp (k)                | RGB         |
| 环境温度 Environment Temperature (°C) | -40~45      |
| 使用寿命 Lifespan (h)                 | 30000-80000 |




### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

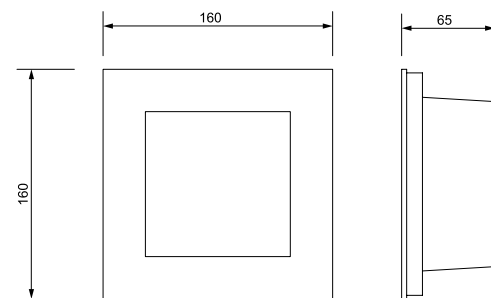

### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-DM025 |          | 20PCS    | 355L×355W×370H   |



## 大功率 LED 投光灯

High-power LED Project Light

BSD-TG001



### 产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Full of color and color temperature changes, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, better applicability and widely used.

### 应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


### 规格参数 Specifications

|                                   |                |
|-----------------------------------|----------------|
| 材 料 Material                      | Al             |
| 防护等级 IP Rating                    | IP65           |
| 功 率 Power (W)                     | 48W            |
| 输入电压 Input Voltage (V)            | 220            |
| 光源类型 Light source Type            | high power LED |
| 芯片尺寸 Chip Size (mil)              | 45             |
| 光源数量 Light Source Quantity (pcs ) | 48             |
| 光源光效 Luminous Efficiency (Lm/W)   | 90-130         |
| 显色指数 CRI                          | 80             |
| 色 温 Color Temp (k)                | 2800-7000      |
| 环境温度 Environment Temperature (°C) | -40~45         |
| 使用寿命 Lifespan (h)                 | 30000-80000    |


### 配光曲线 Light Distribution Curve



### 外形尺寸图 Dimension Diagram

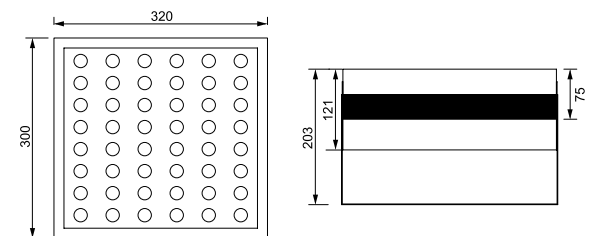

### 包装参数 Packaging Parameters



| Item      | Size(mm) | 包装数量 Qty | 外箱尺寸 Carton Size |
|-----------|----------|----------|------------------|
| BSD-TG001 |          | 2PCS     | 370L×350W×360H   |