

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG011



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	100W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	2
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

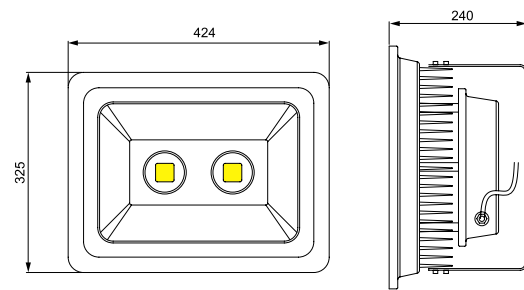

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG011		1PC	400L×275W×185H

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG012
BSD-FG013
BSD-FG014



产品特点 Product Features

灯具电器一体化，造型轻巧美观；超长寿命，多种颜色，色纯度高，显色性好；铝质外壳，粉体烤漆，耐腐蚀，抗冲击；自带安装支架，便于安装调试，仰视角可调。

Integrated design of lighting and electricity with the advantages of compact design. Long lifespan, multicolor, high color purity and CRI. Aluminum shell, powder painting, corrosion resistance and impact resistance. The mounting bracket is convenient for installation, the visual angle is adjustable.

应用场合 Applications


商场、景观照明、户外广告照明等。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	150 / 120 / 100W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1 / 1 / 1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

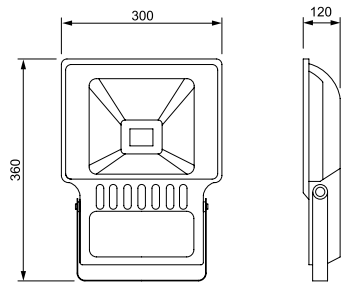

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG012-014		1PC	370L×310W×130H

大功率 LED 泛光灯

High-power LED Flood Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	50W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

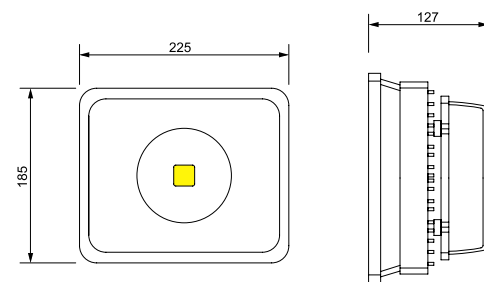

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG015		4PCS	565L×350W×260H

大功率 LED 泛光灯

High-power LED Flood Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	30W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

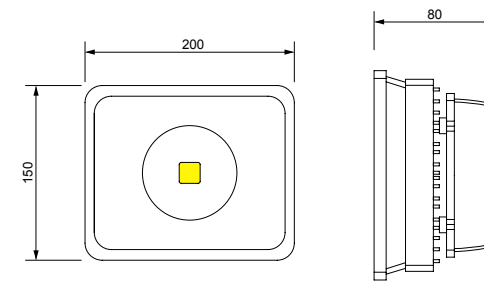

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG016		6PCS	565L×350W×260H



High-power LED Flood Light



产品特点 Product Features


Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	18W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (℃)	-40~45
使用寿命 Lifespan (h)	30000-80000



外形尺寸图 Dimension Diagram

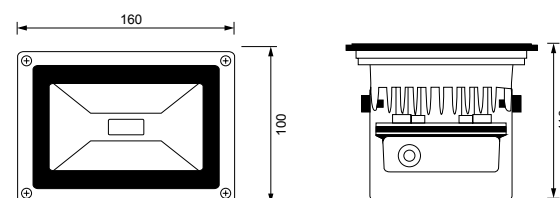

包装参数 Packaging Parameters



Item \ Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG017	10PCS	570L×280W×190H



Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	30W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	——
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

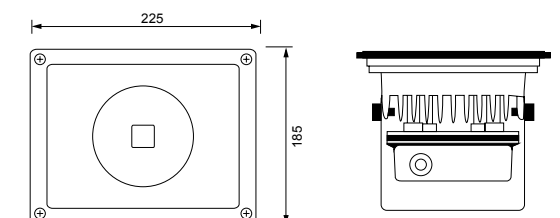

包装参数 Packaging Parameters



Item \ Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG018	4PCS	565L×350W×260H

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG019



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	10W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (℃)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

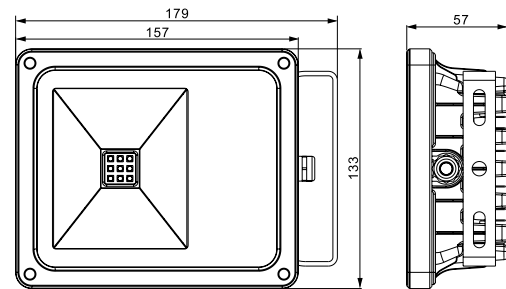

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG019		6PCS	305L×225W×205H

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG020



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	20W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (℃)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

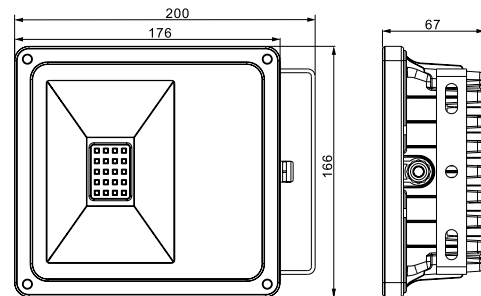

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG020		4PCS	365L×225W×165H

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG021



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	30W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

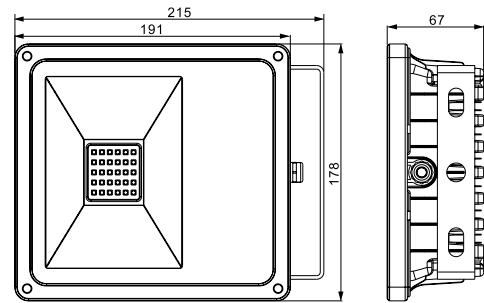

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG021		4PCS	395L×245W×165H

大功率 LED 泛光灯

High-power LED Flood Light



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	50W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

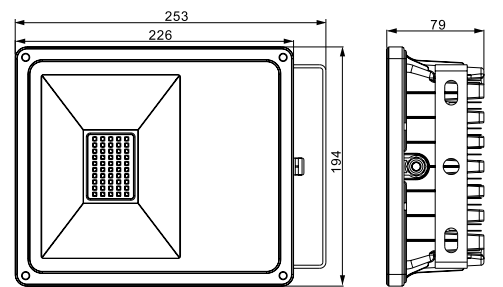

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG022		4PCS	425L×280W×195H

大功率 LED 泛光灯

High-power LED Flood Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	70W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

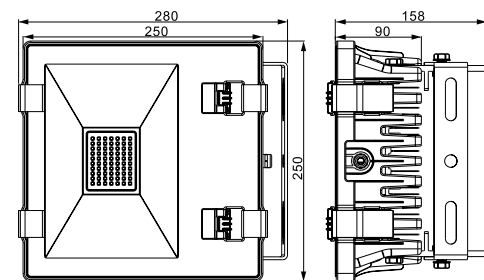

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG023		4PCS	700L×350W×275H

大功率 LED 泛光灯

High-power LED Flood Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	100W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

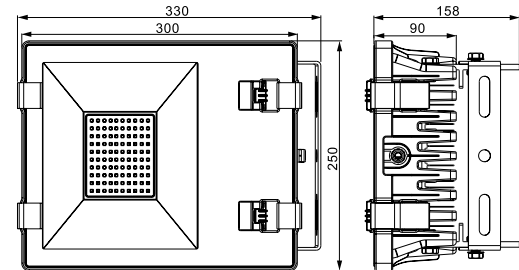

包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG024		2PCS	355L×355W×275H

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG025

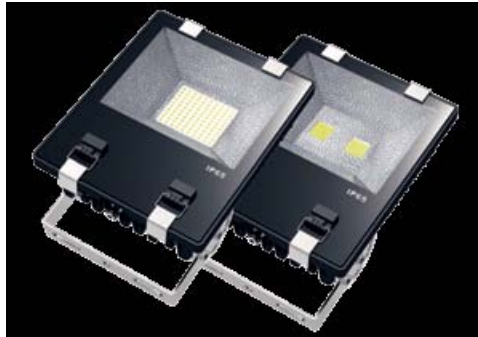

产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	120W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (℃)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

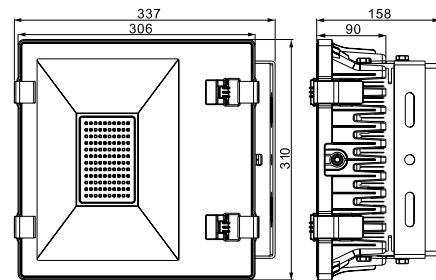

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG025		2PCS	435L×335W×335H



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	150W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (℃)	-40~45
使用寿命 Lifespan (h)	30000-80000


大功率 LED 泛光灯

High-power LED Flood Light


BSD-FG026




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

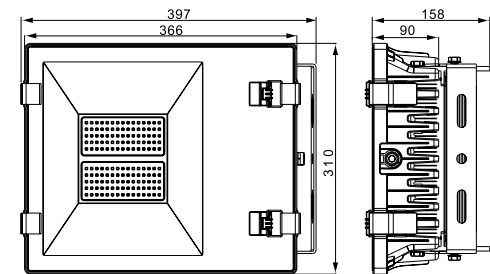

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG026		2PCS	435L×335W×335H

大功率 LED 泛光灯

High-power LED Flood Light

BSD-FG027



产品特点 Product Features

采用大功率LED，设计理念领先，优质铝材和高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻，节能效果突出，品牌保证，有很强的性价比优势，适用性强，应用十分广泛。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Changeable color and color temperature, outstanding energy-saving effect, having a strong cost performance advantage, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawn, garden and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	200W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	Integrated LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

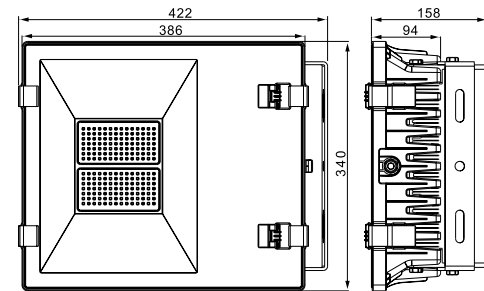

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-FG027		2PCS	435L×335W×335H

大功率 LED 射灯

High-power LED Spot Light

BSD-SD001



产品特点 Product Features

灯具外壳采用优质铝材，表面阳极氧化处理。灯体美观精致，散热性能优良。灯体采用钢化玻璃及硅橡胶密封，内部环氧树脂灌封。确保灯具卓越的防水性能。灯具光源均采用进口超高亮大功率LED灯珠。内置恒流驱动电源，确保灯具性能稳定。

The lamp shell adapt high-quality aluminum and anodic oxidation processing. The light body uses toughened glass and high-quality silicon rubber seal ring, exquisite beauty and has excellent heat dissipation. To ensure the superior waterproofness, using imported super bright white LED as the light source. Built-in constant current driving power to ensure the stability of lamps and lanterns.

应用场合 Applications


该产品使用于建筑外墙，楼梯轮廓，广场灯光，园林树木，道路，拍照摄像补光等场合。

Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	3W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

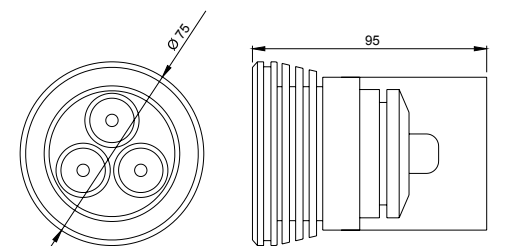

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD001		100PCS	400L×400W×380H



大功率 LED 射灯

High-power LED Spot Light

BSD-SD002



产品特点 Product Features

灯具外壳采用优质铝材，表面阳极氧化处理。灯体美观精致，散热性能优良。灯体采用钢化玻璃及硅橡胶密封，内部环氧树脂灌封。确保灯具卓越的防水性能。灯具光源均采用进口超高亮大功率LED灯珠。内置恒流驱动电源，确保灯具性能稳定。

The lamp shell adapt high-quality aluminum and anodic oxidation processing. The light body uses toughened glass and high-quality silicon rubber seal ring, exquisite beauty and has excellent heat dissipation. To ensure the superior waterproofness, using imported super bright white LED as the light source. Built-in constant current driving power to ensure the stability of lamps and lanterns.


应用场合 Applications

该产品使用于建筑外墙，楼梯轮廓，广场灯光，园林树木，道路，拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	3W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

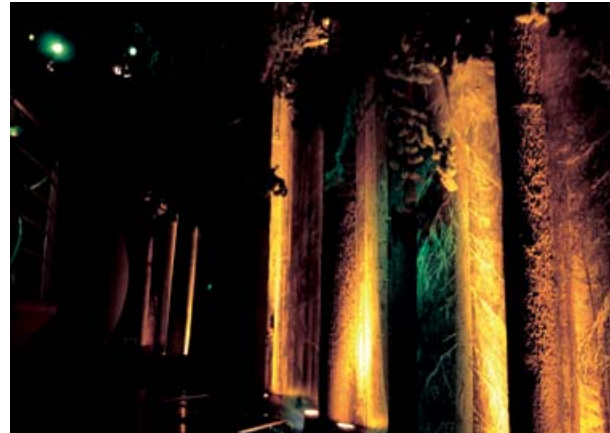


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

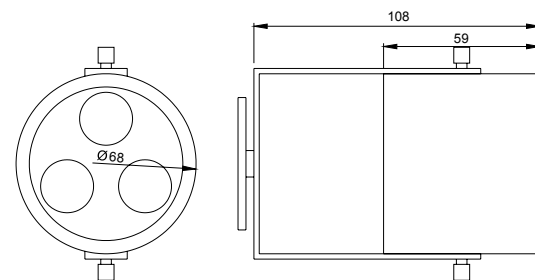

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD002		100PCS	360L×360W×420H



产品特点 Product Features

灯具外壳采用优质铝材，表面阳极氧化处理。灯体美观精致，散热性能优良。灯体采用钢化玻璃及硅橡胶密封，内部环氧树脂灌封。确保灯具卓越的防水性能。灯具光源均采用进口超高亮大功率LED灯珠。内置恒流驱动电源，确保灯具性能稳定。

The lamp shell adapt high-quality aluminum and anodic oxidation processing. The light body uses toughened glass and high-quality silicon rubber seal ring, exquisite beauty and has excellent heat dissipation. To ensure the superior waterproofness, using imported super bright white LED as the light source. Built-in constant current driving power to ensure the stability of lamps and lanterns.

应用场合 Applications

该产品使用于建筑外墙，楼梯轮廓，广场灯光，园林树木，道路，拍照摄像补光等场合。

Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	3W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

大功率 LED 射灯


High-power LED Spot Light




BSD-SD003




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

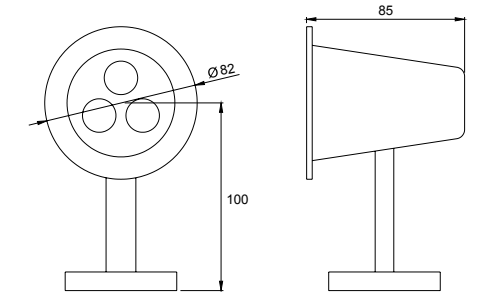

包装参数 Packaging Parameters

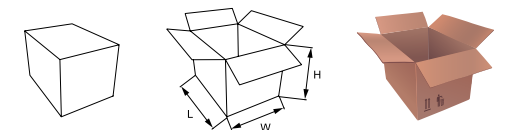

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD003		20PCS	320L×430W×320H



大功率 LED 射灯

High-power LED Spot Light

BSD-SD004



产品特点 Product Features

灯具外壳采用优质铝材，表面阳极氧化处理。灯体美观精致，散热性能优良。灯体采用钢化玻璃及硅橡胶密封，内部环氧树脂灌封。确保灯具卓越的防水性能。灯具光源均采用进口超高亮大功率LED灯珠。内置恒流驱动电源，确保灯具性能稳定。

The lamp shell adapt high-quality aluminum and anodic oxidation processing. The light body uses toughened glass and high-quality silicon rubber seal ring, exquisite beauty and has excellent heat dissipation. To ensure the superior waterproofness, using imported super bright white LED as the light source. Built-in constant current driving power to ensure the stability of lamps and lanterns.

应用场合 Applications

该产品使用于建筑外墙，楼梯轮廓，广场灯光，园林树木，道路，拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	5W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	5
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

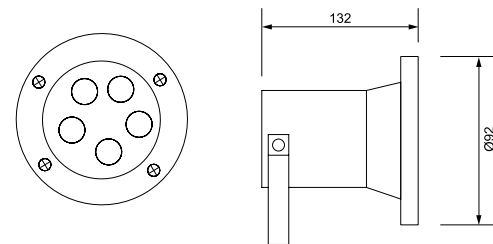

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD004		50PCS	500L×500W×300H



产品特点 Product Features

采用大功率LED，设计理念领先，高级耐腐材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Full of color and color temperature changes.

应用场合 Applications

该产品使用于建筑外墙，楼梯轮廓，广场灯光，园林树木，道路，拍照摄像补光等场合。

Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	3W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

大功率 LED 射灯


High-power LED Spot Light




BSD-SD005




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

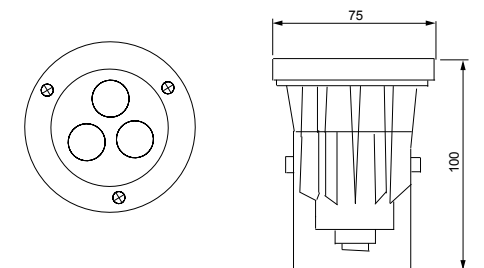

包装参数 Packaging Parameters

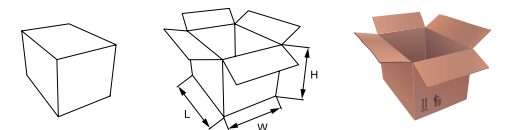

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD005		100PCS	450L×450W×450H