



大功率 LED 射灯

High-power LED Spot Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Full of color and color temperature changes.

应用场合 Applications

该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	5W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	5
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

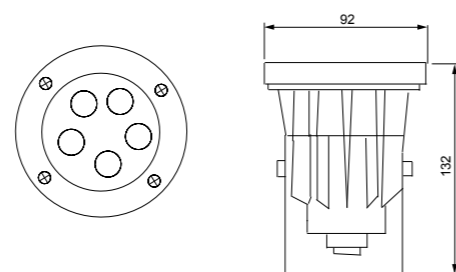

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD006		50PCS	500L×500W×300H



大功率 LED 射灯

High-power LED Spot Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Full of color and color temperature changes.

应用场合 Applications


该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。

Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	6W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

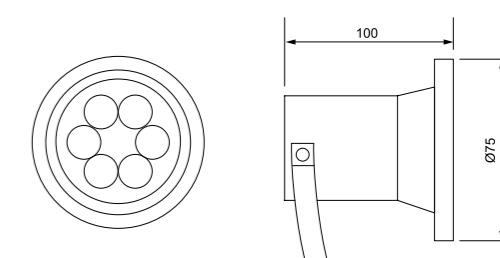

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD007		100PCS	450L×450W×450H



大功率 LED 射灯

High-power LED Spot Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Full of color and color temperature changes.


应用场合 Applications

该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	9W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	9
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

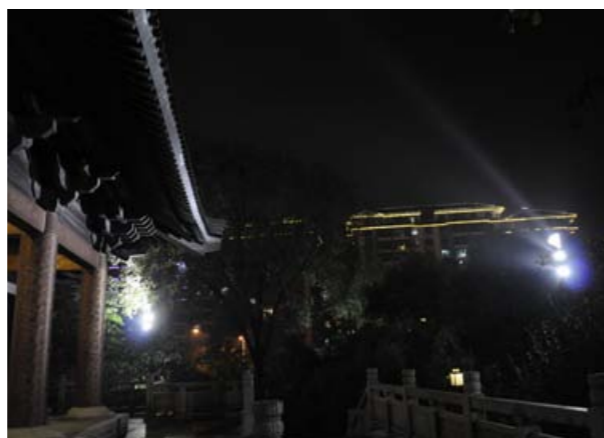


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

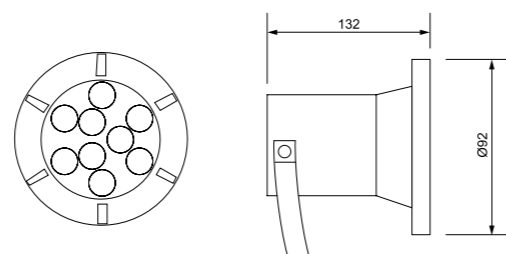

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD008		50PCS	500L×500W×300H



大功率 LED 射灯

High-power LED Spot Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Using high-power LED, design-leading, precision production with high-quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Full of color and color temperature changes.

应用场合 Applications


该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。

Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	12W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

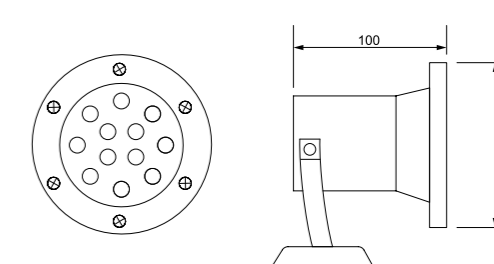

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD009		100PCS	450L×450W×450H



大功率 LED 射灯

High-power LED Spot Light

BSD-SD010



产品特点 Product Features

导热硅胶灌封, 外表更加美观, 同时也进一步提高散热效果, 寿命更长。

Thermal silicone encapsulating, beautiful and elegant outlook, further to improve the heat dissipation efficiency and prolong lifespan.

应用场合 Applications

该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	6W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

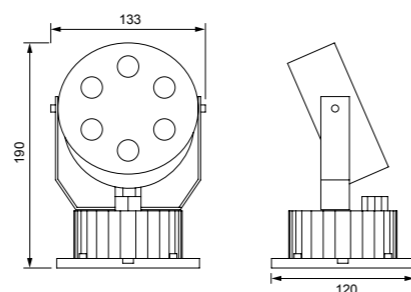

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD010		6PCS	500L×360W×250H



大功率 LED 射灯

High-power LED Spot Light

BSD-SD011



产品特点 Product Features

导热硅胶灌封, 外表更加美观, 同时也进一步提高散热效果, 寿命更长。

Thermal silicone encapsulating, beautiful and elegant outlook, further to improve the heat dissipation efficiency and prolong lifespan.

应用场合 Applications

该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	12W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

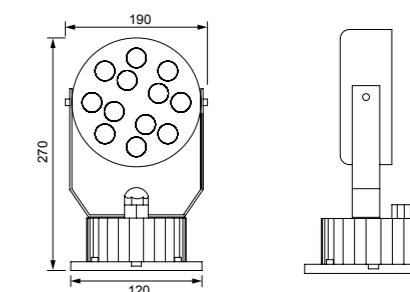

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD011		6PCS	500L×400W×380H



大功率 LED 射灯

High-power LED Spot Light

BSD-SD012



产品特点 Product Features

导热硅胶灌封, 外表更加美观, 同时也进一步提高散热效果, 寿命更长。

Thermal silicone encapsulating, beautiful and elegant outlook, further to improve the heat dissipation efficiency and prolong lifespan.


应用场合 Applications

该产品使用于建筑外墙, 楼梯轮廓, 广场灯光, 园林树木, 道路, 拍照摄像补光等场合。


Apply to exterior wall of building, stair, square, garden, and filling light of photographing occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	18W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	18
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	红/绿/蓝/白 R/G/B/W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

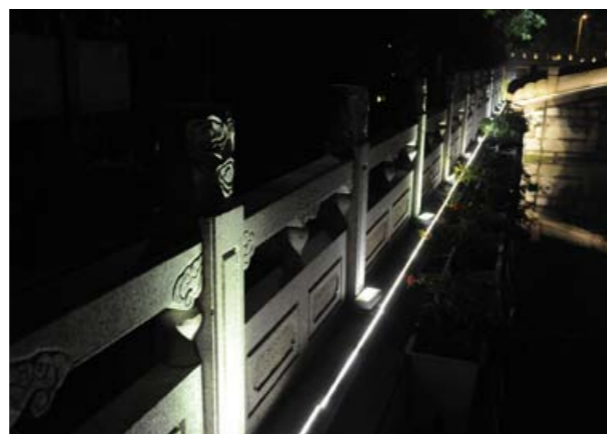


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

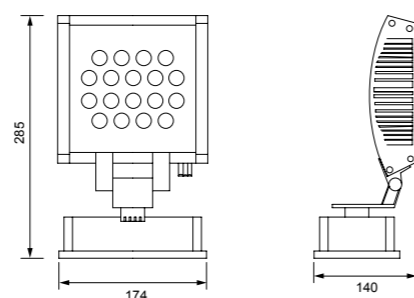

包装参数 Packaging Parameters

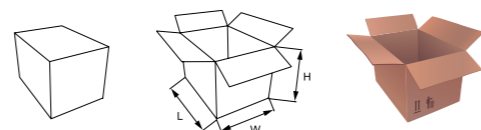

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SD012		4PCS	440L×380W×340H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ001



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	3W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

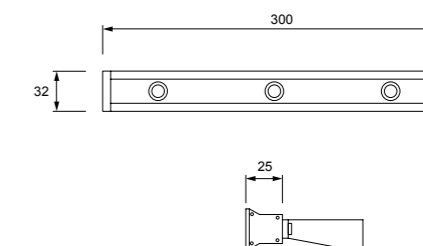

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ001		20PCS	350L×210W×150H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ002



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.


应用场合 Applications

适用于体育馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	6W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

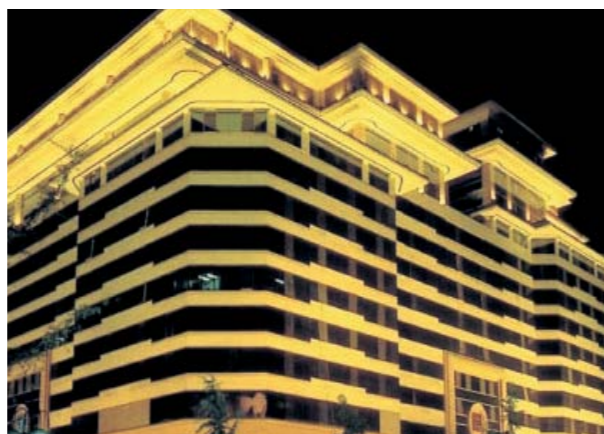


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

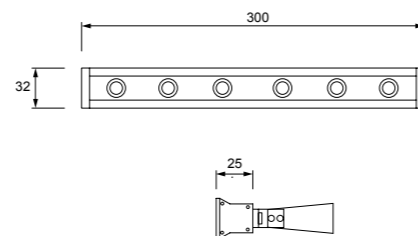

包装参数 Packaging Parameters

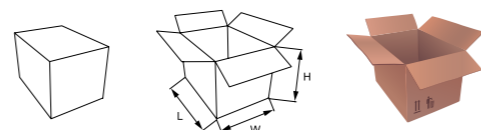

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ002		20PCS	350L×210W×150H



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	9W
输入电压 Input Voltage (V)	85-265
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	9
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

大功率 LED 洗墙灯


High-power LED Wall Washer Light




BSD-XQ003




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

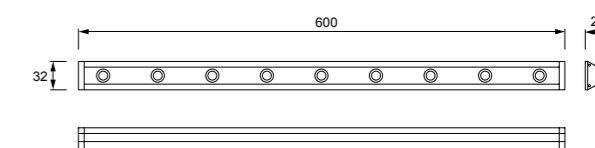

包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ003		20PCS	650L×210W×150H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

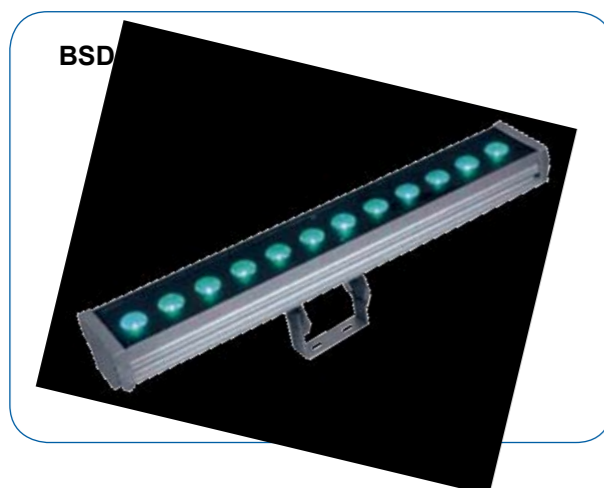

产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	12W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

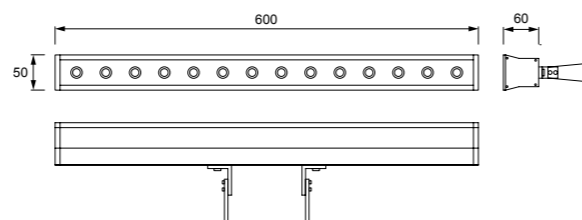

包装参数 Packaging Parameters

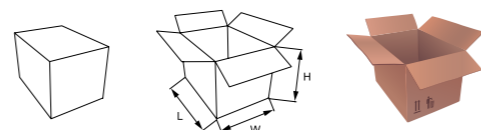

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ004		20PCS	650L×210W×150H



大功率 LED 洗墙灯

High-power LED Wall Washer Light



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	18W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	18
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

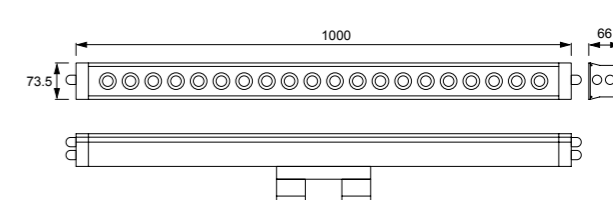

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ005		10PCS	1050L×380W×200H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ006



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	24W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	24
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve




外形尺寸图 Dimension Diagram

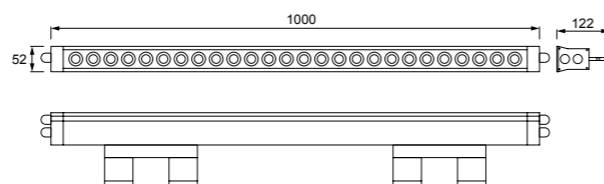

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ006		6PCS	1050L×300W×200H

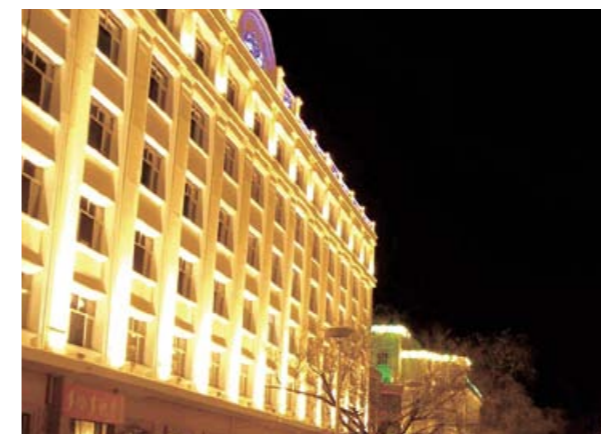

产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.


应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	30W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	30
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




大功率 LED 洗墙灯

High-power LED Wall Washer Light


BSD-XQ007




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

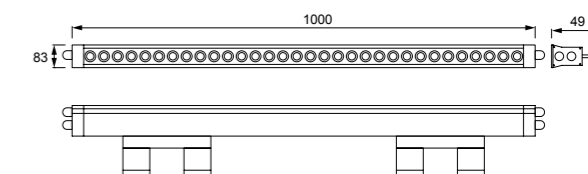

包装参数 Packaging Parameters

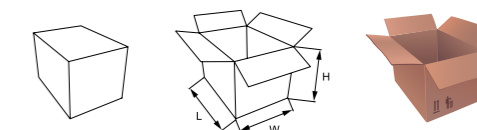

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ007		6PCS	1050L×300W×130H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ008



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.


应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	36W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	36
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

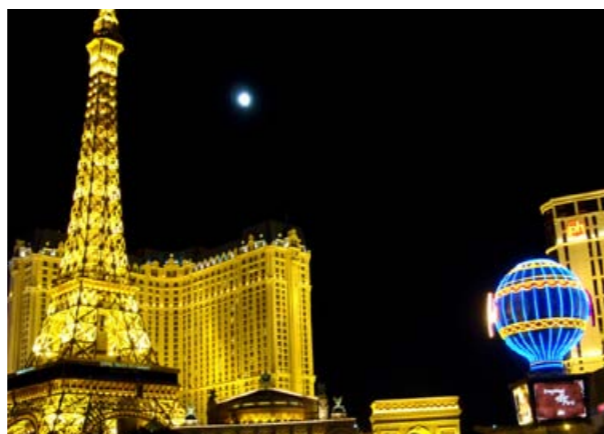


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

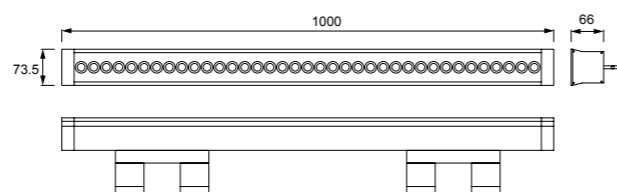

包装参数 Packaging Parameters

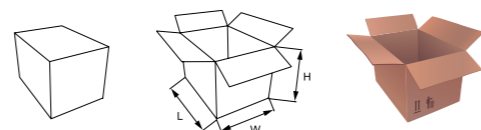


Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ008		6PCS	1050L×380W×200H

大功率 LED 洗墙灯

High-power LED Wall Washer Light



BSD-XQ009

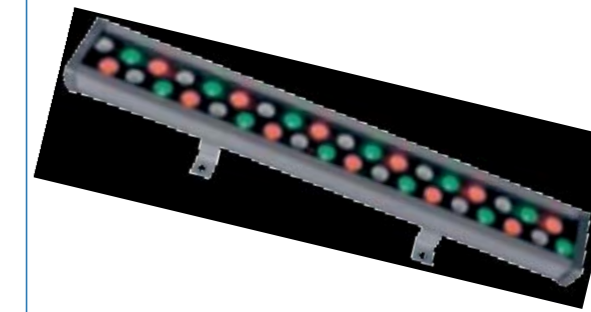

产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	48W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	48
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

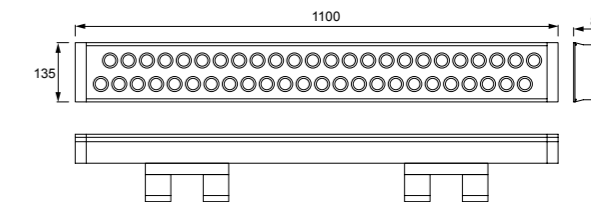

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ009		6PCS	1050L×320W×200H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ010



产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.


应用场合 Applications

适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。


Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	54W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	54
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

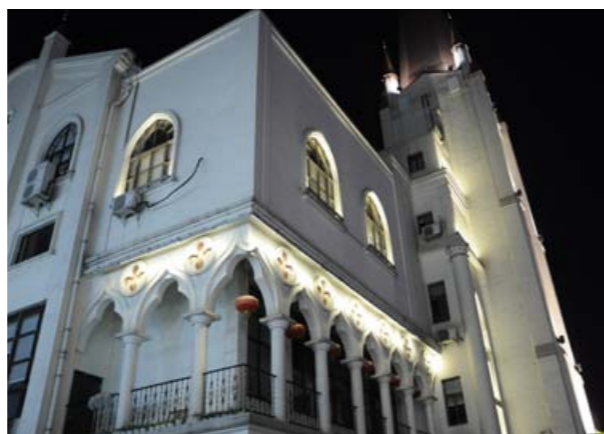


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

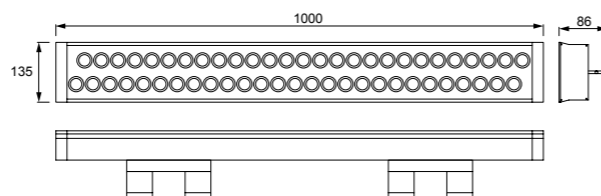

包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ010		4PCS	1050L*320W*200H



大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ011

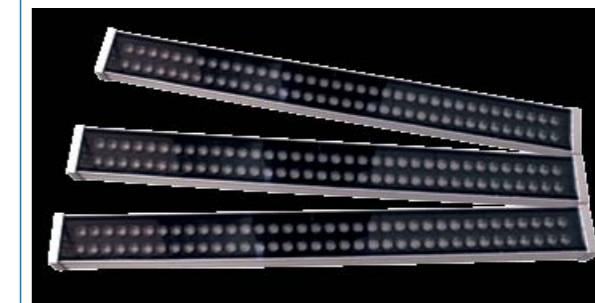

产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	72W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	72
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

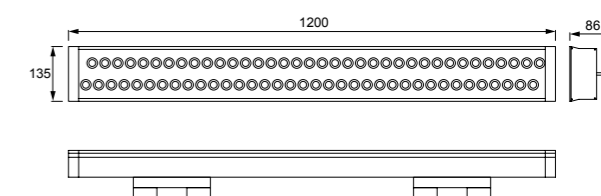

包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ011		4PCS	1250L*320W*200H

大功率 LED 洗墙灯

High-power LED Wall Washer Light

BSD-XQ012

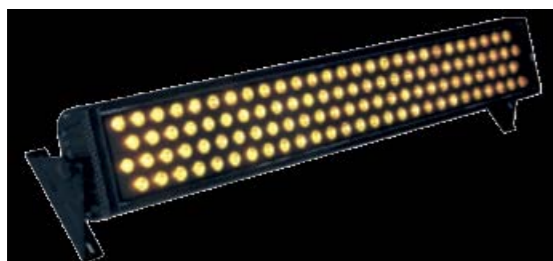

产品特点 Product Features

采用大功率LED, 设计理念领先, 优质铝材和高级耐腐材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻, 节能效果突出, 品牌保证, 有很强的性价比优势, 适用性强, 应用十分广泛。

Using high-power LED, design-leading, precision production with high quality aluminum & high corrosion-resistant materials. Excellent overall performance, compact structure, high light efficiency. Full of color and color temperature changes, outstanding energy-saving effect, brand assurance, strong applicability and widely used.

应用场合 Applications


适用于体育场馆、大型超市、展览馆、广告牌、建筑物、雕塑等投光照明及草坪、园艺等景观照明。

Apply to the flood lighting such as sports stadiums, supermarkets, exhibition halls, billboards, buildings, sculptures, and the landscape lighting such as lawns, gardens and so on.


规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP65
功 率 Power (W)	108W
输入电压 Input Voltage (V)	100-240
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	108
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

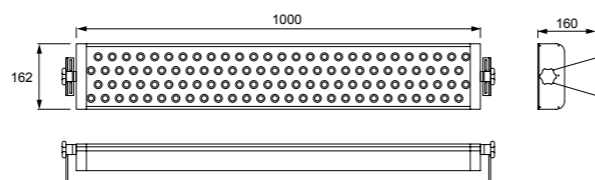

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-XQ012		2PCS	1050L×370W×210H

LED 水下灯

LED Under Water Light

BSD-SX001



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点; 采用红、绿、蓝三基色发光二极管混色产生七色效果, 能满足不同场合对发光色彩的要求; 颜色纯正, 发光均匀, 穿透烟、雾能力强。在浓烟或浓雾时能清晰看见。安装方便, 维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications


适用于各种喷泉、水池等景观照明。

Apply to all kinds of fountains, pools and the like landscape lighting.


规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	3W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

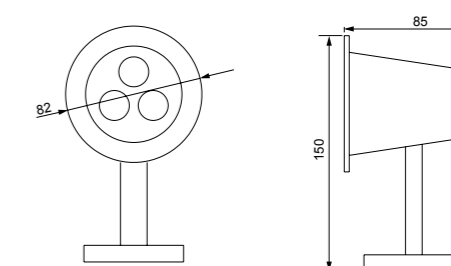

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX001		50PCS	450L×450W×320H