



LED 水下灯

LED Under Water Light



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于各种喷泉、水池等景观照明。


Apply to all kinds of fountains, pools and the like landscape lighting.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	6W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

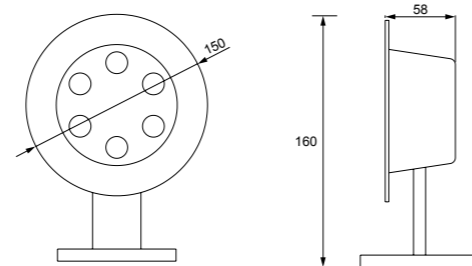

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX002		40PCS	600L×340W×320H



LED 水下灯

LED Under Water Light



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications


适用于各种喷泉、水池等景观照明。

Apply to all kinds of fountains, pools and the like landscape lighting.


规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	9W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	9
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

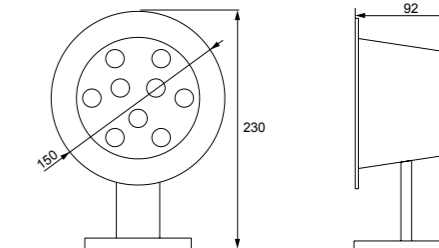

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX003		30PCS	480L×480W×470H



LED 水下灯

LED Under Water Light



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.


应用场合 Applications

适用于各种喷泉、水池等景观照明。


Apply to all kinds of fountains, pools and the like landscape lighting.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	12W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

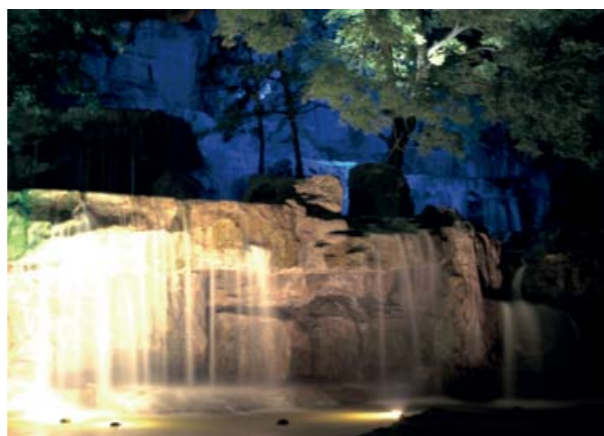


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

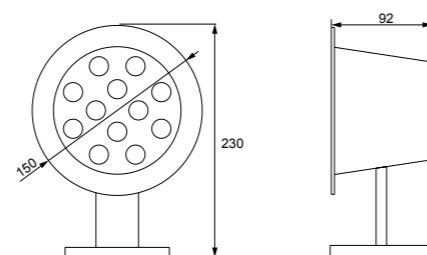

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX004		30PCS	480L×480W×470H



产品特点 Product Features

LED为光源，灯体采用压铸铝材铸造，完全符合IP68防护等级；可承受10M水柱冲击，灯具中间为水柱喷孔，可使光配合水柱移动追踪；本灯体适合各式色彩控制器。

The underwater light uses LED as light source, die-cast aluminum as light body, completely meets IP68. Can be affordable 10 meters water column impact, there is a spray orifice in the middle of lamp, which can make light cooperate with water column movement. It is suitable for all kinds of color controllers.

应用场合 Applications

适用于水底、喷泉、营造气氛。

Apply to underwater, fountain and creating atmosphere occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP68
功 率 Power (W)	12W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

LED 水下灯


LED Under Water Light




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

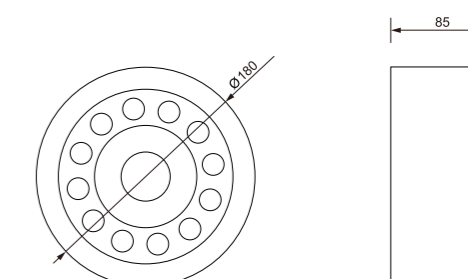

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX005		20PCS	440L×340W×340H



LED 水下灯

LED Under Water Light

BSD-SX006



产品特点 Product Features

LED为光源，灯体采用压铸铝材铸造，完全符合IP68防护等级；可承受10M水柱冲击，灯具中间为水柱喷孔，可使光配合水柱移动追踪；本灯体适合各式色彩控制器。

The underwater light uses LED as light source, die-cast aluminum as light body, completely meets IP68. Can be affordable 10 meters water column impact, there is a spray orifice in the middle of lamp, which can make light cooperate with water column movement. It is suitable for all kinds of color controllers.

应用场合 Applications

适用于水底、喷泉、营造气氛。


Apply to underwater, fountain and creating atmosphere occasion.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP68
功 率 Power (W)	12W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

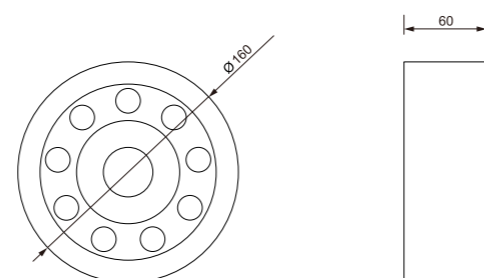

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX006		20PCS	355L×355W×270H



产品特点 Product Features

设计理念领先，高级耐腐蚀材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications

材 料 Material	Al
防护等级 IP Rating	IP68
功 率 Power (W)	6W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

LED 水下灯


LED Under Water Light




BSD-SX007




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

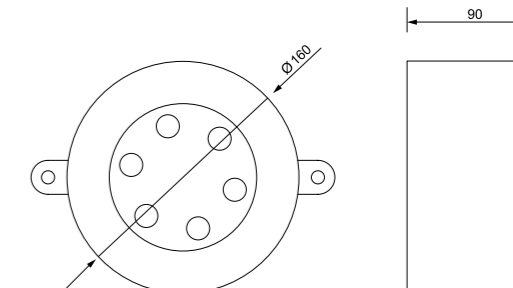

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX007		16PCS	380L×380W×420H



LED 水下灯

LED Under Water Light

BSD-SX008



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于水底、喷泉、营造气氛。


Apply to underwater, fountain and creating atmosphere occasion.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	12W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	12
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX008		20PCS	420L×420W×570H



LED 水下灯

LED Under Water Light

BSD-SX009



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于水底、喷泉、营造气氛。


Apply to underwater, fountain and creating atmosphere occasion.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	18W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	18
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX009		20PCS	670L×345W×460H



LED 水下灯

LED Under Water Light

BSD-SX010



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP68
功 率 Power (W)	5W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	DIP
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	90
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX010		20PCS	645L×355W×420H



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	7W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	DIP
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	120
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

LED 水下灯


LED Under Water Light




BSD-SX011




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX011		20PCS	645L×355W×420H



LED 水下灯

LED Under Water Light

BSD-SX012



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	6W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX012		20PCS	420L×420W×570H



LED 水下灯

LED Under Water Light

BSD-SX013



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications


适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.


规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	6W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	DIP
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	100
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX013		20PCS	420L×420W×570H



LED 水下灯

LED Under Water Light

BSD-SX014



产品特点 Product Features

具有功耗小、产生热量低、寿命长、耐冲击、可靠性高等特点；采用红、绿、蓝三基色发光二极管混色产生七色效果，能满足不同场合对发光色彩的要求；颜色纯正，发光均匀，穿透烟、雾能力强。在浓烟或浓雾中能清晰看见。安装方便，维护费用低。

With characteristics of low power consumption, low heat consumption, long lifespan, impact resistance and high reliability. Rainbow color effect can be formed by combination of the basic color, red, green, blue, can meet the requirements of different occasions. Pure color, uniform luminance, high penetrability for smoke and fog. It is clear in heavy smoke and fog environment. Easy to install and low maintenance cost.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	4W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	DIP
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	54
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve




外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX014		20PCS	420L×420W×570H

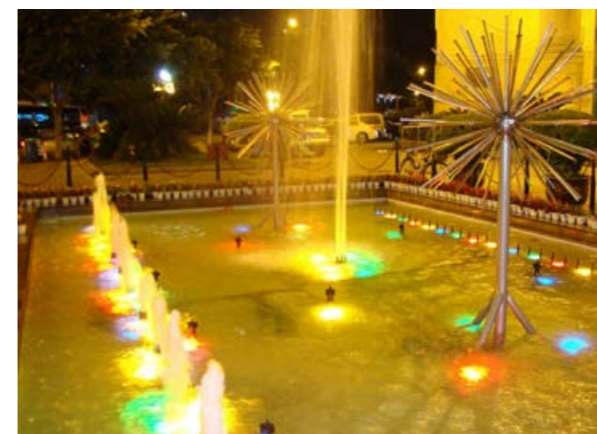

产品特点 Product Features

设计理念领先，高级耐腐材料精工制作，整体性能优良，结构小巧，高效发光，富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。

Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	18W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	18
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

LED 水下灯


LED Under Water Light




BSD-SX015




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX015		8PCS	435L×435W×315H



LED 水下灯

LED Under Water Light

BSD-SX016



产品特点 Product Features

设计理念领先, 高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	6W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX016		20PCS	420L×420W×570H



LED 水下灯

LED Under Water Light

BSD-SX017

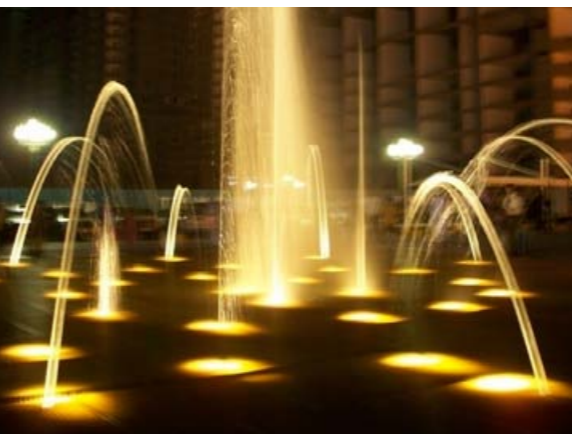

产品特点 Product Features

设计理念领先, 高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications


适用于水底、喷泉、营造气氛。

Apply to underwater, fountain and creating atmosphere occasion.


规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	1W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	1
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

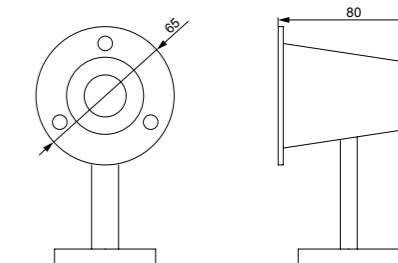

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX017		100PCS	380L×380W×370H



LED 水下灯

LED Under Water Light

BSD-SX018



产品特点 Product Features

设计理念领先, 高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	3W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

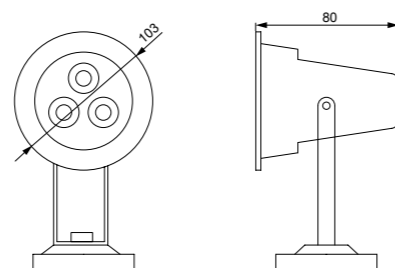

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX018		36PCS	360L×360W×370H

LED 水下灯

LED Under Water Light



BSD-SX019



产品特点 Product Features

设计理念领先, 高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications

适用于草坪、园艺、绿地景观照明。


Apply to the lawn, garden, district greening and other landscape lighting.

规格参数 Specifications


材 料 Material	Al
防护等级 IP Rating	IP68
功 率 Power (W)	3W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	3
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

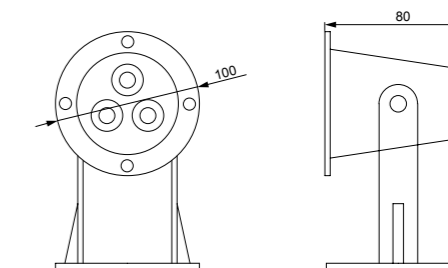

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX019		36PCS	350L×350W×370H



LED 水下灯

LED Under Water Light

BSD-SX020



产品特点 Product Features

设计理念领先, 高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications

适用于水底、喷泉、营造气氛。


Apply to underwater, fountain and creating atmosphere occasion.

规格参数 Specifications


材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	6W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	6
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

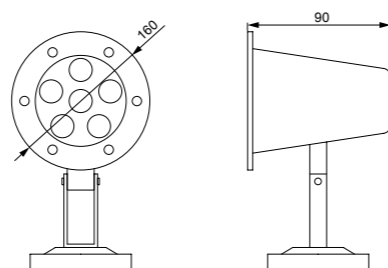

包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX020		12PCS	370L×370W×320H



LED 水下灯

LED Under Water Light

BSD-SX021

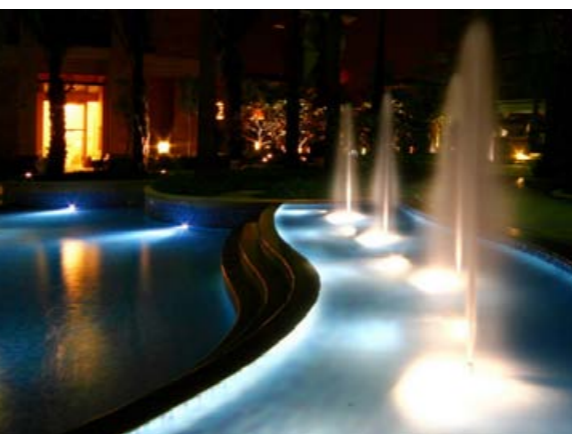

产品特点 Product Features

设计理念领先, 高级耐腐蚀材料精工制作, 整体性能优良, 结构小巧, 高效发光, 富于色彩与色温变幻。

Design-leading, precision production with high corrosion-resistant materials. Excellent overall performance, compact structure, high lighting efficiency. Changeable color and color temperature.

应用场合 Applications


适用于水底、喷泉、营造气氛。

Apply to underwater, fountain and creating atmosphere occasion.


规格参数 Specifications

材 料 Material	不锈钢 Stainless Steel
防护等级 IP Rating	IP68
功 率 Power (W)	9W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	high power LED
芯片尺寸 Chip Size (mil)	45
光源数量 Light Source Quantity (pcs)	9
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	80
色 温 Color Temp (k)	2800-7000
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


配光曲线 Light Distribution Curve



外形尺寸图 Dimension Diagram

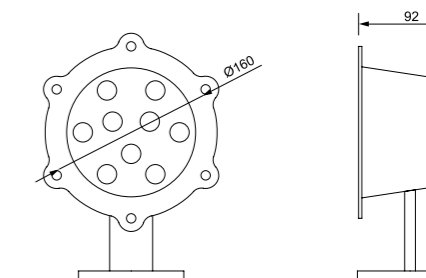

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-SX021		12PCS	370L×370W×350H