




LED 流星雨


LED Meteor Shower




BSD-LXY012

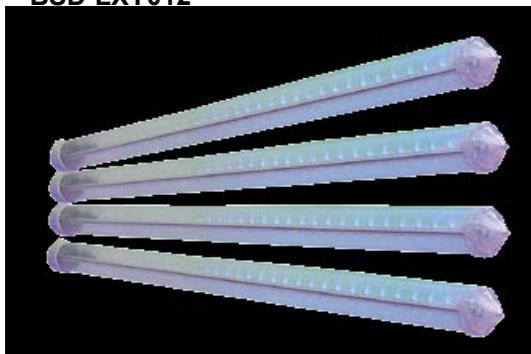

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters

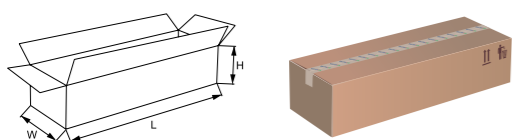

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY012		30PCS	650L×215W×210H

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications

市场工程亮化,建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化,旅游景点美化,园林、社区夜晶装饰,酒店、商场、娱乐场所周边环境夜景装饰,家居装饰.

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.32W
输入电压 Input Voltage (V)	220
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	32
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




LED 流星雨


LED Meteor Shower




BSD-LXY013

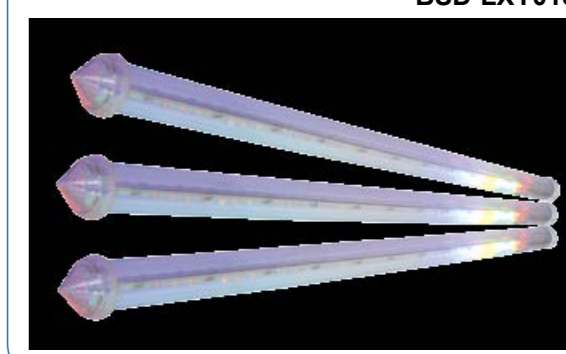

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters

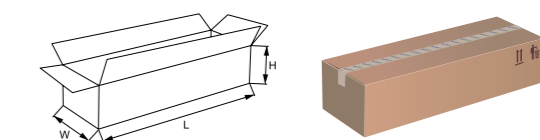

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY013		30PCS	650L×215W×210H

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications

市场工程亮化,建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化,旅游景点美化,园林、社区夜晶装饰,酒店、商场、娱乐场所周边环境夜景装饰,家居装饰.

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.64W
输入电压 Input Voltage (V)	220
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	64
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




LED 流星雨


LED Meteor Shower




BSD-LXY014

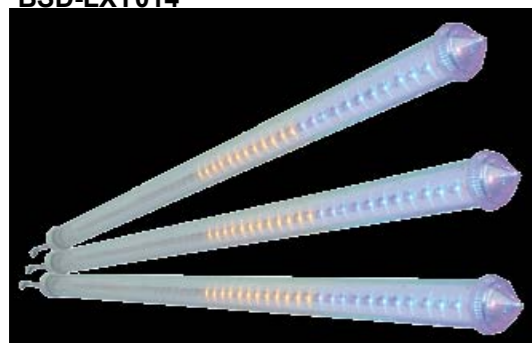

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters

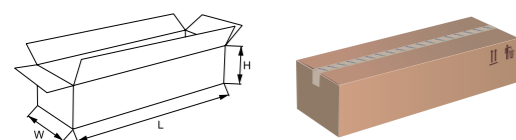

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY014		30PCS	650L×215W×210H

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications

市场工程亮化, 建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化, 旅游景点美化, 园林、社区夜晶装饰, 酒店、商场、娱乐场所周边环境夜景装饰, 家居装饰.

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.96W
输入电压 Input Voltage (V)	220
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	96
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




LED 流星雨


LED Meteor Shower




BSD-LXY015

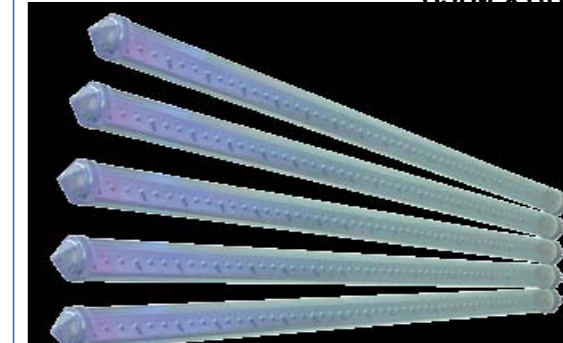

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters

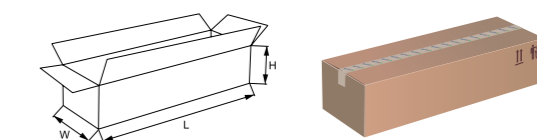

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY015		30PCS	850L×215W×210H

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications

市场工程亮化, 建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化, 旅游景点美化, 园林、社区夜晶装饰, 酒店、商场、娱乐场所周边环境夜景装饰, 家居装饰.

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.44W
输入电压 Input Voltage (V)	220
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	44
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




LED 流星雨


LED Meteor Shower




BSD-LXY016

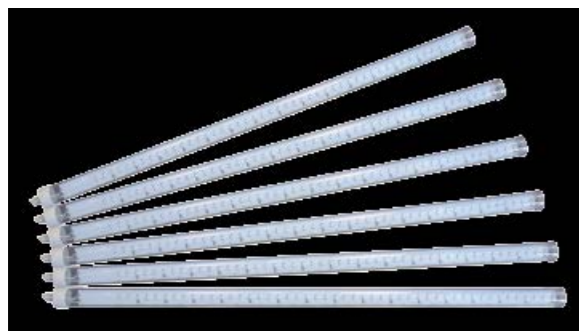

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters

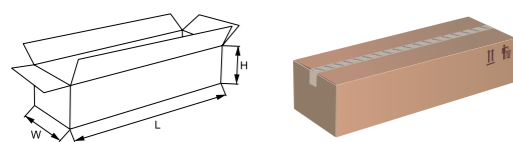

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY016		30PCS	850L×215W×210H

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications

市场工程亮化,建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化,旅游景点美化,园林、社区夜晶装饰,酒店、商场、娱乐场所周边环境夜景装饰,家居装饰.

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.


规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.96W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	3528 LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	96
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000



LED 流星雨

LED Meteor Shower

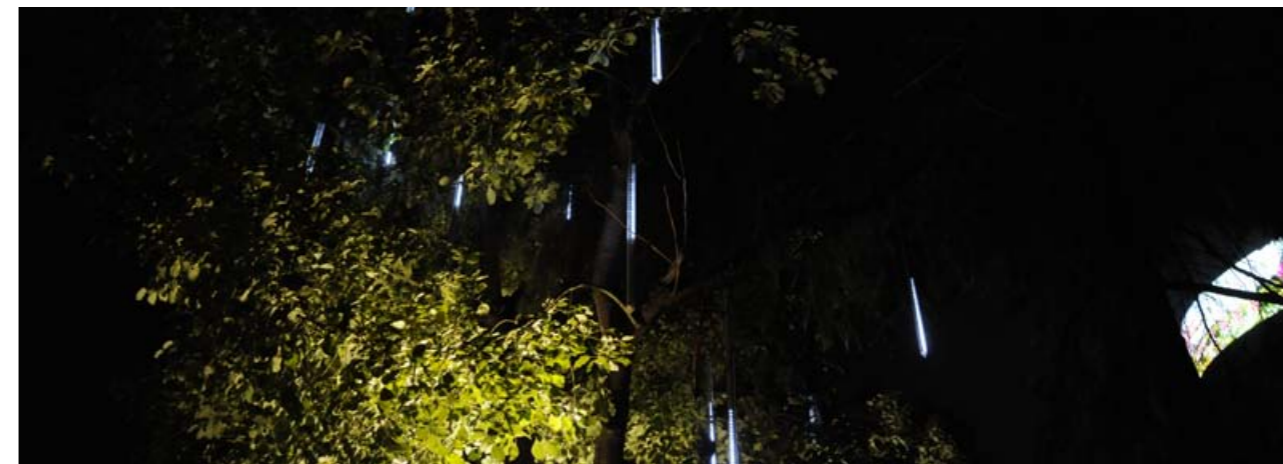

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications


市场工程亮化,建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化,旅游景点美化,园林、社区夜晶装饰,酒店、商场、娱乐场所周边环境夜景装饰,家居装饰.

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.


规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.64W
输入电压 Input Voltage (V)	12
光源类型 Light source Type	3528 LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	64
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


BSD-LXY017

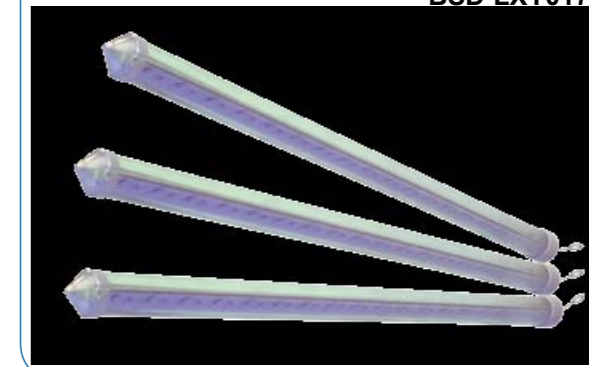

外形尺寸图 Dimension Diagram




包装参数 Packaging Parameters

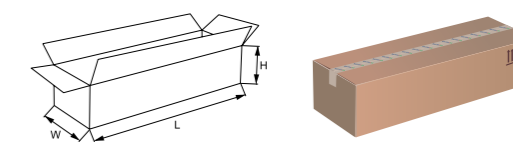


Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY017		30PCS	650L×215W×210H

LED 流星雨


LED Meteor Shower

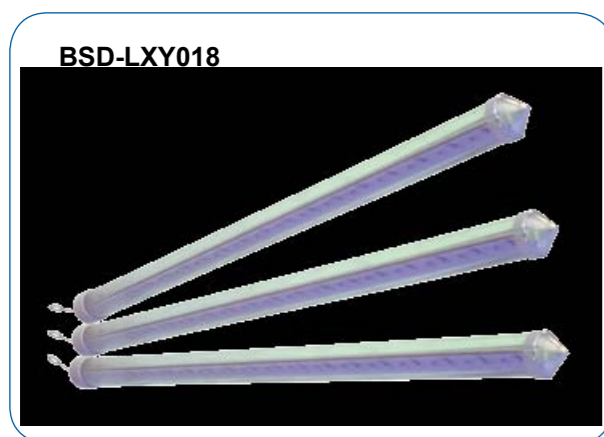

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters

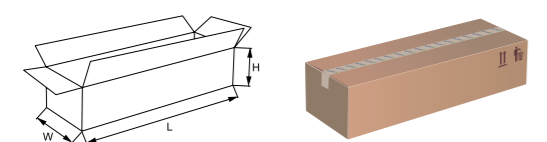

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-LXY018		30PCS	850L×215W×210H

产品特点 Product Features

流星效果，浪漫唯美；外带驱动，低压供电，可根据需求任意增减灯管数量，随意发挥；防水、防尘、防腐蚀，不受时间、空间限制。

Meteor effect, romantic and aesthetic, external driving, low-voltage power supply, the quantity can be added or reduced according to the demand. Waterproof, dustproof, corrosion resistance, without time and space limited.

应用场合 Applications

市场工程亮化,建筑装饰、街道两旁树木装饰、公园装饰、江边装饰、城市夜景亮化,旅游景点美化,园林、社区夜晶装饰,酒店、商场、娱乐场所周边环境夜景装饰,家居装饰。

Apply to market engineering lighting, decoration of architecture, street, park and river, urban night lighting, scenic spot lighting, community night scene, garden, hotel, shopping mall, decorative lighting of entertainment place and home decoration.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	0.72W
输入电压 Input Voltage (V)	220
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	72
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

LED 护栏管

LED Guardrail Light



产品特点 Product Features

单色护栏管有多种颜色可选，长度可任意选择。寿命长，节能环保，光色柔和，亮度高。抗紫外线照射，防水、防潮。

Monochromatic guardrail tube with variety of colors and lengths for selecting. Long lifespan, energy efficiency and environmental protection, soft light, high brightness. Anti-ultraviolet radiation, waterproof and moistureproof.


应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。


Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications


材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	10W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	108
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

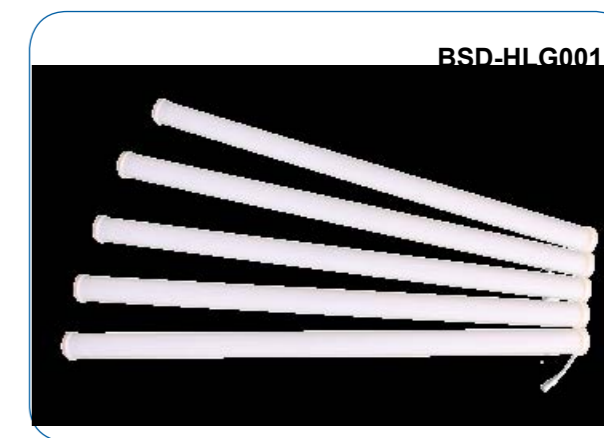


安装示意图 Installation Diagram

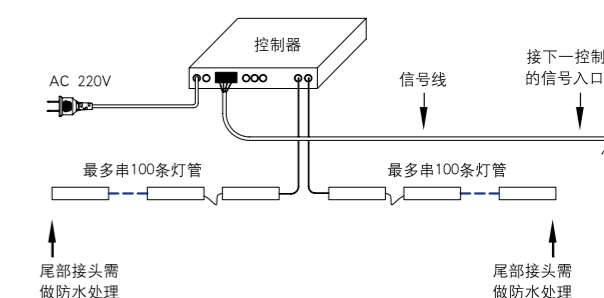

外形尺寸图 Dimension Diagram

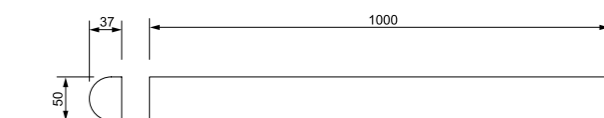

包装参数 Packaging Parameters

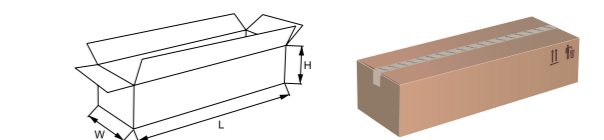


Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG001		20PCS	1250L×215W×210H



LED 护栏管

LED Guardrail Light

BSD-HLG002

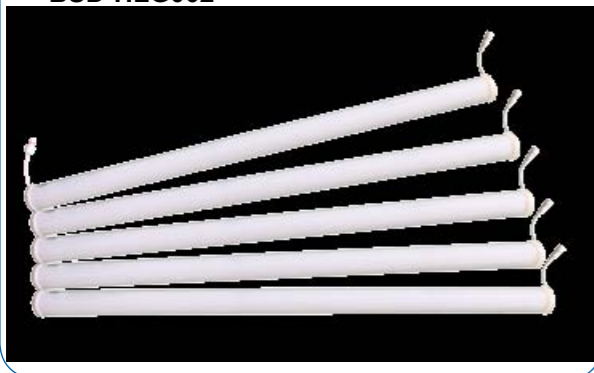

产品特点 Product Features

可均匀排布形成大面积区域可显示图形和文字，并可播放不同格式视频文件、FLASH、动画等文件，或使用动画软件设计个性化动画，播放各种动感变色的图文效果。

Many tubes can uniformly form a large area for displaying figures and characters and also broadcasting different kinds of video files, flash, cartoon, and other files. Using animation software to design personal cartoon and then to play various dynamic color light effect.

应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。


Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications


材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	10W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	108
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




安装示意图 Installation Diagram

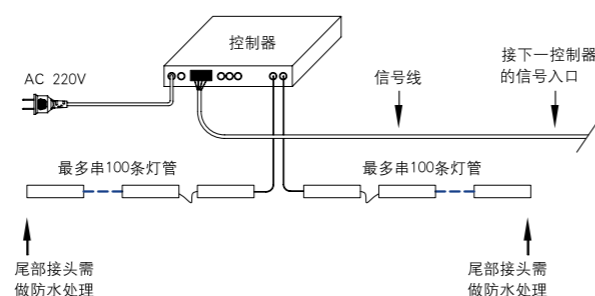

外形尺寸图 Dimension Diagram

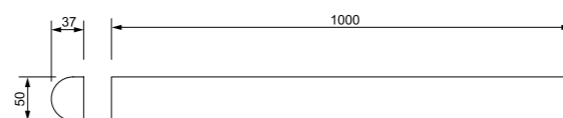

包装参数 Packaging Parameters





Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG002		20PCS	1250L*215W*210H

LED 护栏管

LED Guardrail Light



BSD-HLG003

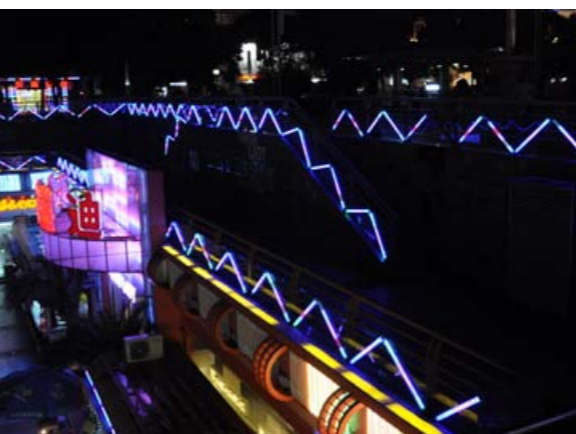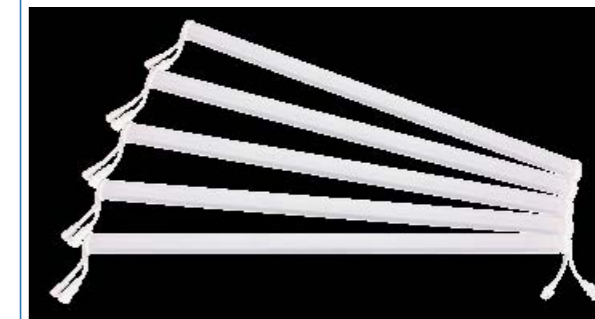

产品特点 Product Features

可均匀排布形成大面积区域可显示图形和文字，并可播放不同格式视频文件、FLASH、动画、文字等文件，或使用动画软件设计个性化动画，播放各种动感变色的图文效果。

Many tubes can uniformly form a large area for displaying figures and characters and also broadcasting different kinds of video files, flash, cartoon, and other files. Using animation software to design personal cartoon and then to play various dynamic color light effect.

应用场合 Applications


适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。

Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.


规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	10W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	108
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	RGB
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


安装示意图 Installation Diagram

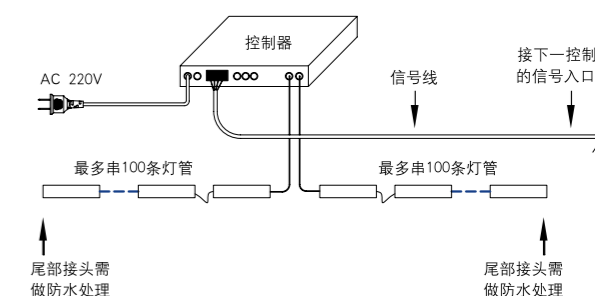

外形尺寸图 Dimension Diagram

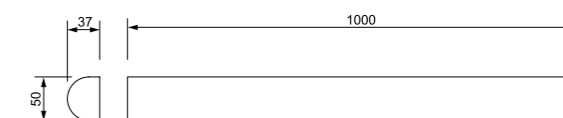

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG003		20PCS	1250L*215W*210H



LED 护栏管

LED Guardrail Light

BSD-HLG004



产品特点 Product Features

可均匀排布形成大面积区域可显示图形和文字，并可播放不同格式视文件、FLASH、动画、文字等文件，或使用动画软件设计个性化动画，播放各种动感变色的图文效果。

Many tubes can uniformly form a large area for displaying figures and characters and also broadcasting different kinds of video files, flash, cartoon, and other files. Using animation software to design personal cartoon and then to play various dynamic color light effect.

应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。


Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications


材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	16W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	144
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	全彩 Full Color
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




安装示意图 Installation Diagram

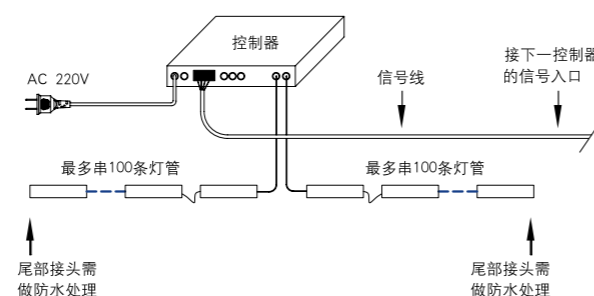

外形尺寸图 Dimension Diagram



包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG004		20PCS	1250L*215W*210H



产品特点 Product Features

一根灯管能够同时变化出七种不同颜色，并可产生渐变、闪变、扫描、追逐、流水等各种效果，多根灯管一起配合 还可以展示图形和文字。变化时间、变化形式可以任意控制，灯管长度可任意选择。寿命长，节能环保，光色柔和，亮度高。抗紫外线照射，防水、防潮。

One tube can light 7 colors at the same time, and achive the light effects like gradual change, flash, scanning, chasing, running water and etc. Several tubes arranged together can display figure and character. The changing time, light effect and the length of tube can be selected. Long lifespan, energy efficiency and environmental protection, soft light, high brightness. Anti-ultraviolet radiation, waterproof and moistureproof.

应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。

Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	14W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	128
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000

LED 护栏管


LED Guardrail Light




BSD-HLG005




安装示意图 Installation Diagram

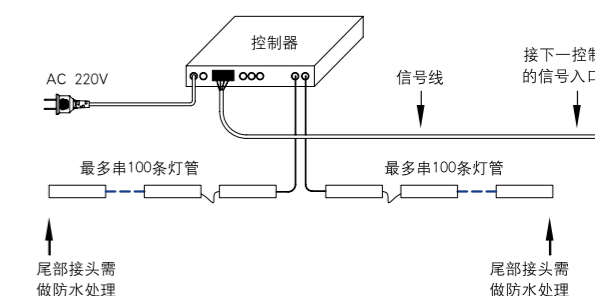

外形尺寸图 Dimension Diagram

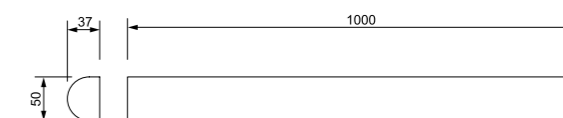

包装参数 Packaging Parameters




Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG005		20PCS	1250L*215W*210H



LED 护栏管

LED Guardrail Light

BSD-HLG006

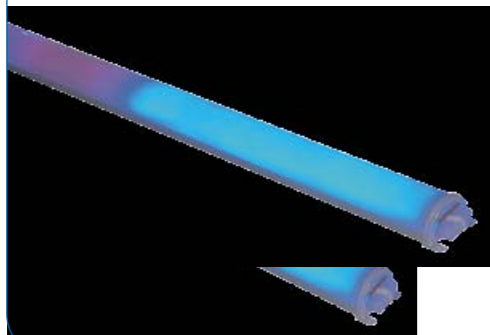

产品特点 Product Features

一根灯管能够同时变化出七种不同颜色，并可产生渐变、闪变、扫描、追逐、流水等各种效果，多根灯管一起配合还可以展示图形和文字。变化时间、变化形式可以任意控制，灯管长度可任意选择。寿命长，节能环保，光色柔和，亮度高。抗紫外线照射，防水、防潮。

One tube can light 7 colors at the same time, and achieve the light effects like gradual change, flash, scanning, chasing, running water and etc. Several tubes arranged together can display figure and character. The changing time, light effect and the length of tube can be selected. Long lifespan, energy efficiency and environmental protection, soft light, high brightness. Anti-ultraviolet radiation, waterproof and moistureproof.

应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。


Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications


材料 Material	FR-4
防护等级 IP Rating	IP65
功率 Power (W)	10W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	108
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




安装示意图 Installation Diagram

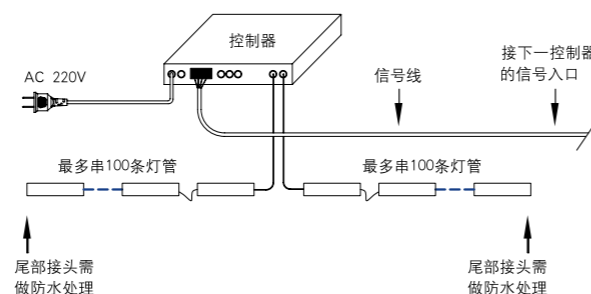

外形尺寸图 Dimension Diagram

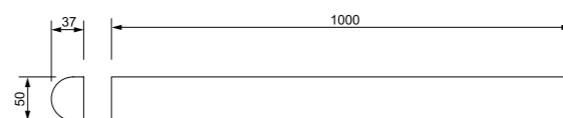

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG006		20PCS	1250L×215W×210H



LED 护栏管

LED Guardrail Light

BSD-HLG007



产品特点 Product Features

一根灯管能够同时变化出七种不同颜色，并可产生渐变、闪变、扫描、追逐、流水等各种效果，多根灯管一起配合还可以展示图形和文字。变化时间、变化形式可以任意控制，灯管长度可任意选择。寿命长，节能环保，光色柔和，亮度高。抗紫外线照射，防水、防潮。

One tube can light 7 colors at the same time, and achieve the light effects like gradual change, flash, scanning, chasing, running water and etc. Several tubes arranged together can display figure and character. The changing time, light effect and the length of tube can be selected. Long lifespan, energy efficiency and environmental protection, soft light, high brightness. Anti-ultraviolet radiation, waterproof and moistureproof.

应用场合 Applications


适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。

Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.


规格参数 Specifications

材料 Material	FR-4
防护等级 IP Rating	IP65
功率 Power (W)	10W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	3528 LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	108
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


安装示意图 Installation Diagram

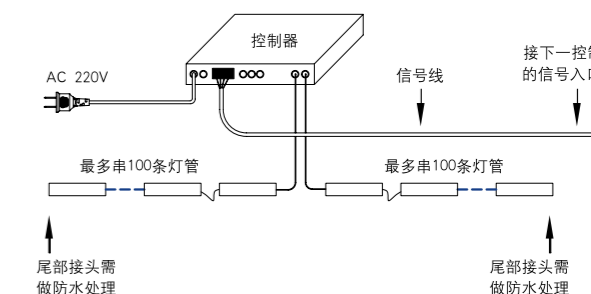

外形尺寸图 Dimension Diagram

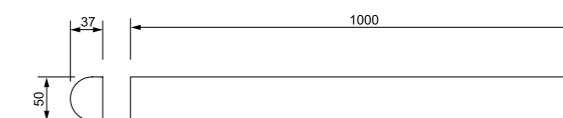

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG007		20PCS	1250L×215W×210H



LED 护栏管

LED Guardrail Light

BSD-HLG008



产品特点 Product Features

一根灯管能够同时变化出七种不同颜色，并可产生渐变、闪变、扫描、追逐、流水等各种效果，多根灯管一起配合还可以展示图形和文字。变化时间、变化形式可以任意控制，灯管长度可任意选择。寿命长，节能环保，光色柔和，亮度高。抗紫外线照射，防水、防潮。

One tube can light 7 colors at the same time, and achieve the light effects like gradual change, flash, scanning, chasing, running water and etc. Several tubes arranged together can display figure and character. The changing time, light effect and the length of tube can be selected. Long lifespan, energy efficiency and environmental protection, soft light, high brightness. Anti-ultraviolet radiation, waterproof and moistureproof.

应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。


Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications


材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	16W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	3528 LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	144
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	R / Y / G / B / W
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




安装示意图 Installation Diagram

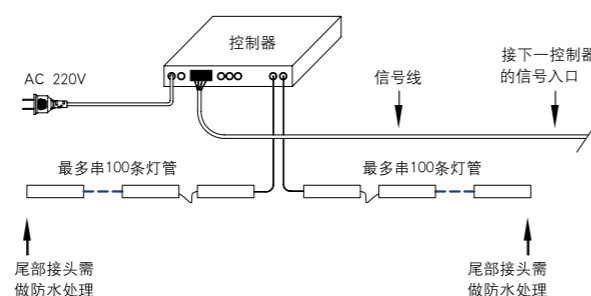

外形尺寸图 Dimension Diagram

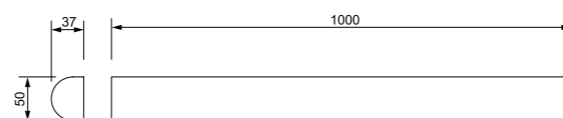

包装参数 Packaging Parameters



Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG008		20PCS	1250L×215W×210H



产品特点 Product Features

可均匀排布形成大面积区域可显示图形和文字，并可播放不同格式视文件、FLASH、动画、文字等文件，或使用动画软件设计个性化动画，播放各种动感变色的图文效果。

Many tubes can uniformly form a large area for displaying figures and characters and also broadcasting different kinds of video files, flash, cartoon, and other files. Using animation software to design personal cartoon and then to play various dynamic color light effect.

应用场合 Applications

适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。

Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.

规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	12W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	DIP LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	128
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	全彩 Full Color
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000




LED 护栏管

LED Guardrail Light


BSD-HLG009




安装示意图 Installation Diagram

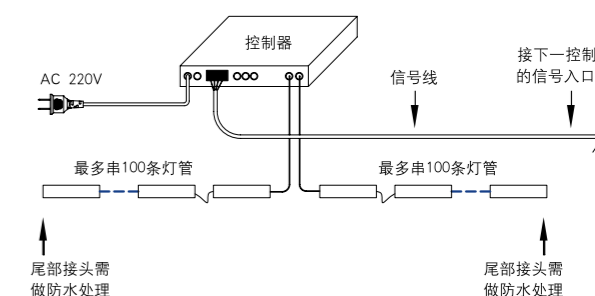

外形尺寸图 Dimension Diagram

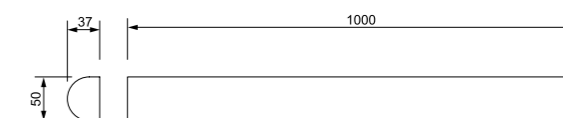

包装参数 Packaging Parameters

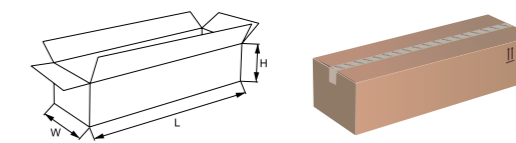

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG009		20PCS	1250L×215W×210H



LED 护栏管

LED Guardrail Light

BSD-HLG010



产品特点 Product Features

可均匀排布形成大面积区域可显示图形和文字，并可播放不同格式视文件、FLASH、动画、文字等文件，或使用动画软件设计个性化动画，播放各种动感变色的图文效果。

Many tubes can uniformly form a large area for displaying figures and characters and also broadcasting different kinds of video files, flash, cartoon, and other files. Using animation software to design personal cartoon and then to play various dynamic color light effect.

应用场合 Applications


适用于广告牌背景、立交桥、河、湖护栏、高档的DISCO、酒吧、夜总会、休闲会所、门头广告牌建筑物轮廓等大型动感光带之中。

Apply to billboard background, overpass, river and lake guardrail, fancy DISCO, bar, night club, leisure clubhouse, outdoor billboard, building outline and large dynamic light band.


规格参数 Specifications

材 料 Material	FR-4
防护等级 IP Rating	IP65
功 率 Power (W)	16W
输入电压 Input Voltage (V)	DC12-24
光源类型 Light source Type	3528 LED
芯片尺寸 Chip Size (mil)	12*12
光源数量 Light Source Quantity (pcs)	144
光源光效 Luminous Efficiency (Lm/W)	90-130
显色指数 CRI	—
色 温 Color Temp (k)	全彩 Full Color
环境温度 Environment Temperature (°C)	-40~45
使用寿命 Lifespan (h)	30000-80000


安装示意图 Installation Diagram

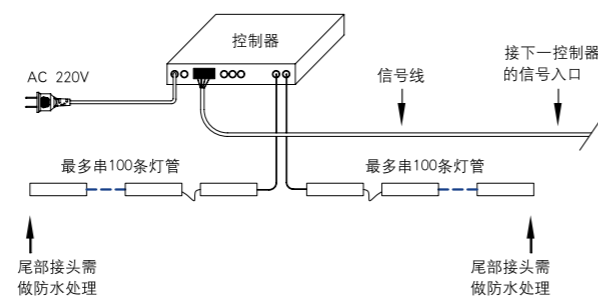

外形尺寸图 Dimension Diagram

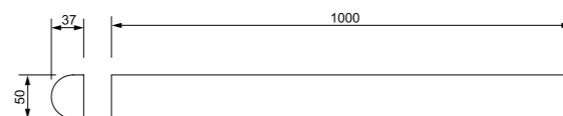

包装参数 Packaging Parameters

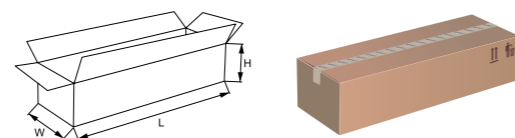

Item	Size(mm)	包装数量 Qty	外箱尺寸 Carton Size
BSD-HLG010		20PCS	1250L×215W×210H